

PHANTOM X^{li}

IMPORTANT: ALUMINUM FRAME. NOT INTENDED FOR HARD RIDING. DO NOT JUMP OR HIT CURBS, AVOID IMPACTS. INSPECT FRAME FOR FRACTURES. SERIOUS BODILY HARM CAN OCCUR IF MISUSED.
SEE MANUAL FOR ADDITIONAL INFORMATION.



You have purchased one of the highest quality electric bicycles available today. It is important you read this manual to understand your new bicycle. All riders including experienced non-electric bicycle riders should read this manual. This manual explains the functions of your new electric bicycle and details on performing basic maintenance. All riders must read the section on throttling prior to mounting the bicycle due to the nature of how to power the bicycle forward. Please take the time to register your new Prodeco Technologies electric bicycle for the warranty to take effect.

USER GUIDE

Some of the content of this manual may differ from your bicycle depending on the options of the bicycle and what your dealer provided.

© 2013 PRODECO TECHNOLOGIES. All rights reserved. PRODECO TECHNOLOGIES and the PRODECO TECHNOLOGIES logo are trademarks of PRODECO TECHNOLOGIES. Printed in USA.

Table of Contents

1) Chapter 1: Introduction	4
a. About this manual	4
b. Important notices	4
c. General warning	4
d. A special note to parents	5
2) Chapter 2: Getting Started	5
a. Unpacking your box	5
b. Folding and unfolding	5
c. Familiarize yourself with your bicycle's parts	6
d. Contents of the box	6
e. A guideline of your Phantom X tool set	6
f. Registering your new bike	6
3) Chapter 3: Basic Instructions	7
a. Bicycle fit	7
b. Adjusting the saddle	7
c. Installing and adjusting the handlebar stem	8
d. Your local electric bicycle and bicycle laws	8
e. Safety first	9
f. Mechanical safety check	10
g. Before your first motorized ride	10
h. First motorized ride	10
i. Riding an electric bicycle	10
j. Using your throttle	11
k. Using your brakes	11
l. Pedaling	11
m. Shifting gears	11
n. Watching for obstacles around you	12
o. Safe riding in various conditions	12
p. Charging your battery	12
4) Chapter 4: Safety	12
a. The basics	12
b. Riding safety	13
c. Wet weather riding	13
d. Reflectors	14
e. Night riding	14
f. Adding accessories	14
5) Chapter 5: Perfect Fit and Ride	14
a. The basics	14
b. Frame size	14
c. Recommended sizing	14
d. Control position adjustments	14
e. Brake lever height adjustments	15
f. Suspension fork adjustment	15
6) Chapter 6: Tire, Tube, Wheel or Axle Repair	15
a. Removing the front motor wheel	15
b. Installing the front motor wheel	15
c. Removing and installing the rear wheel	16
d. Replacing a tube or tire	16
7) Chapter 7: Maintenance and Replacement	18
a. Keeping your bike clean	18
b. Avoid scratching your bike	18
c. Brake bed-in and adjustments	18
d. Brake pad replacement	19
e. Derailleur adjustments	20
f. Wheel check	21
g. Lubricating	22
h. Crankset	22
i. Pedals	22
j. Headset	22
k. Maintenance schedule	22
l. Torque specifications for common parts	23

8) Chapter 8: Battery Management	23
a. About your battery	23
b. Removing the battery	23
c. Installing and locking the battery	24
d. Charging the battery	25
e. Storing the battery	25
f. Battery power indicator	25
g. Battery replacement	25
h. Battery disposal	25
9) Chapter 9: Electrical Components	26
a. HUB motor	26
b. Brushless hall sensor controller	26
c. Wiring harness	26
d. Throttle	26
10) Chapter 10: Warranty Service and Repair	27
a. 2 year limited warranty	27
b. Registering your bike	28
c. Serial numbers and where to find them	28
d. Registration card	28
e. Part replacement procedure	29
f. Contacting Prodeco Technologies	29
11) Chapter 11: Specifications	29
12) Chapter 12: Parts	30

OPERATIONAL INSTRUCTIONS

Chapter 1: Introduction

Prodeco Technologies thanks you for your purchase of your new Phantom X. Your bicycle is a high quality and environmentally friendly light electric vehicle. This manual will serve to provide you with the information needed to operate, maintain and enjoy it safely. Your electric bicycle should provide you with years of healthy enjoyment provided you follow these steps.

For technical questions or customer service, please contact PRODECO TECHNOLOGIES at 800.943.6190 or e-mail us at service@prodecotech.com.

a) About this manual

To prevent serious injury to yourself and others, and to prevent damage to the bicycle please read and understand these instructions completely before operating your Prodeco Technologies Phantom X. Your new bicycle is a powerful and reliable electric bicycle. You should use caution and care while getting accustomed to your bicycle's riding characteristics. The following manual will provide basic instructions regarding your bicycle's care and maintenance, battery management, operating procedures, and other important information. You should read it thoroughly before riding your new bicycle for the first time. If you have any questions that are not answered in this manual, contact your local authorized Prodeco Technologies dealer or you can call customer service at 800.943.6190.

b) Important notices

- Always remove the key from the battery when your bicycle is not in use, replacing a component or performing maintenance.
- Make sure your electric bicycle is properly fitted to you as described in Chapter 3 "Basic Instructions".
- Perform the mechanical safety check described in Chapter 3 "Basic Instructions" section f "Mechanical safety check" before each ride.
- You should ride your Phantom X as a traditional bicycle under pedal power prior to riding under motor power for the first time. This will allow for the familiarization of how your Phantom X rides and balances.
- When riding under power for the first time, press the variable throttle very slowly only after pedaling to a slow speed to understand the strength of the front motor's performance and grip on the road surface.
- Always apply full front & rear brake lever pressure when attempting to mount or dismount the bicycle.
- When attempting to mount or dismount the bicycle, the key should be in the off position on the battery.
- Please read the battery pack and detailed charging instructions found in Chapter 8 "Battery Management" before charging the battery pack for the first time.
- You should fully charge the Li-ion LiFEPO4 battery according to the charging instructions before your first ride.
- You should always fully charge your Li-ion LiFEPO4 battery every 10 miles regardless of the amount of small trip distances.
- You should always fully charge your Li-ion LiFEPO4 battery pack after each round trip ride exceeding 7.5 miles.
- Always store the battery pack in a cool and dry place.
- During periods of prolonged storage, the battery pack should be charged at least once every 6 months at a minimum of 60% or every 3 months at 40%. Do not charge higher than 60% when storing.
- Your Phantom X can be ridden as a traditional bicycle; it is strongly recommended that you also assist with pedaling when riding which can greatly increase the distance between battery charges.
- When riding under power, you can enhance distance in between charges by holding the throttle at 10% below full throttle.
- When riding under power, add as much non-powered coasting (similar to traditional pedaling) by releasing the throttle and allowing the bicycle to freely coast under its own momentum. This will greatly increase the distance between charges.
- Familiarize yourself with throttling (10% below full), pedaling and momentum coasting to optimize the distance being available per charge. If planning a long trip, applying a combination of the 3 distance enhancing methods mentioned above will allow for an uninterrupted power supply for the entire ride.

c) General warning

Like any sport, bicycling involves the risk of injury and damage. By choosing to ride a bicycle, you assume the responsibility for that risk, so you need to know — and to practice — the rules of safe and responsible riding and of proper use and maintenance. Proper use and maintenance of your bicycle reduces risk of injury.

This Manual contains many "Warnings" and "Cautions" concerning the consequences of failure to maintain or inspect your bicycle and of failure to follow safe cycling practices.

 **WARNING:** This image followed by the word **WARNING** indicates a potentially hazardous situation that, if not avoided, could result in serious injury or death.

 **CAUTION:** This image followed by the word **CAUTION** indicates a potentially hazardous situation, which, if not avoided, may result in minor or moderate injury, serious, damage to the bicycle or the voiding of your warranty or is an alert against unsafe practices.

Many of the Warnings and Cautions say, “you may lose control and fall”. Because any fall can result in serious injury or even death, we do not always repeat the warning of possible injury or death. Because it is impossible to anticipate every situation or condition that can occur while riding, this Manual makes no representation about the safe use of the bicycle under all conditions. There are risks associated with the use of any bicycle which cannot be predicted or avoided, and which are the sole responsibility of the rider.

d) A special note to parents

The Prodeco Technologies Phantom X is intended for use by adult riders only. Many state laws require electric bicycle riders to be a minimum age of 16 with some states having minimum ages set as low as 10 years old and other states up to 18 years old (at the time of the writing of this manual). As a parent or guardian, you are responsible for the activities and safety of your minor child including the following of your state and local laws in regards to the riding of an electric bicycle by a minor (under the age of 18). That includes, if your state allows a minor to ride, making sure that your minor child can safely ride and control all of the operations of the bicycle, and fully understands all warnings and cautions as indicated in this User Guide. Please read on if you have determined that your minor child can legally and safely ride and control all of the operations of the bicycle. That includes making sure that the bicycle is properly fitted to the child; that it is in good repair and safe operating condition; that you and your child have learned and understand the safe operation of the bicycle; and that you and your child have learned, understand and obey not only the applicable local motor vehicle, bicycle and traffic laws, but also the common sense rules of safe and responsible bicycling. As a parent or guardian, you should read and understand this manual. Before letting any child ride the Phantom X or any of Prodeco Technologies electric bicycles, review with them all warnings and cautions; as well as the information on the proper usage of your battery pack, charger and bicycle. You must first confirm the laws, rules and regulations regarding electric bicycles in your state, city and local municipality.

▲ WARNING: *Make sure that your child always wears an approved bicycle helmet when riding; but also make sure that your child understands that a bicycle helmet is for bicycling only, and must be removed when not riding. A helmet must not be worn while playing, in play areas, on playground equipment, while climbing trees, or at any time while not riding a bicycle. Failure to follow this warning could result in serious injury or death.*

Chapter 2: Getting Started

● CAUTION: *If you have purchased your bicycle by mail order or through a sales channel whereas your new Phantom X is still in the box, it is recommended you read Chapter 3 “Basic Instructions” section g “Before your first ride” prior to your first ride. There may be additional adjustments required due to shipping by the freight carrier.*

a) Unpacking your box




Your Phantom X arrives fully assembled in it’s box and only requires the insertion of the seatpost and handlebar stem. You can learn how to insert the seatpost and adjust for your height in Chapter 3 “Basic Instructions” section b “Adjusting the saddle”. The insertion of the stem and tightening of the stem bolt is detailed on Chapter 3 “Basic Instructions” section c “Installing and adjusting the stem”.

The Phantom X has been fully tested and adjusted prior to being packed in the Heavy Duty double wall box with a form fitting interior support system. To remove the Phantom X from it’s box, open the top flap of the box and remove the top protection insert. Place one hand under the front portion of the frame and the other hand under the center of the frame. Pull up slowly and the bicycle will lift out of the box. Remove the additional inserts (if attached to bicycle) and set the bicycle down by balancing the bicycle on the opened kick stand and both wheels. The kick stand also performs as a crankset protector. To unfold the bicycle, read the following paragraph, section b.


b) Folding and unfolding (SEE PHOTOS BELOW AND NEXT PAGE)

Folding: Your bicycle has the ability to fold for easy storing and transporting. There is a quick release lever that will allow the bicycle to fold into half of its original size. The pedals can also be folded by squeezing the 2 metal tabs on the outside edges of each pedal, pulling the pedal outwards and then pushing the pedal down. To fold the bicycle you should stand on the right side of the bicycle (the crank set and chain side) and then unclasp the frame hinge lever after turning the small safety release latch up. You will now be able to fold the bicycle in half. To pick up the bicycle once it has been folded, you place one hand under the front portion of the frame and one hand under the center of the frame in front of the seat tube. If folding the bicycle for storage in a closet or small space, after folding, you can roll the bicycle on its own wheel using the saddle nose and handlebar to guide it to the storage area.

Unfolding: Your bicycle can easily be unfolded in a matter of seconds. Stand on the right side of the bicycle (the crank set and chain side) and place one hand around the front portion of the frame and one hand under the center portion of the frame behind the frame hinge. Open the frame to a straight position until the spring in the hinge clasp lever locks the lever in place. Close the lever completely and turn the hinge safety release latch down (clockwise) to lock the frame hinge lever in place. For some, it may be easier to use the handlebar stem and seat post to unfold or fold the bicycle. Confirm the seat post and handlebar stem are tight and secured.

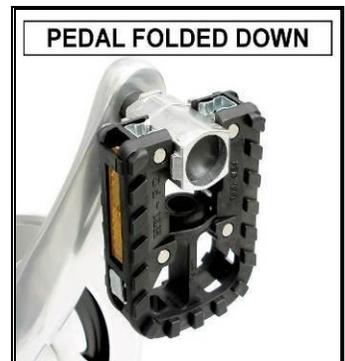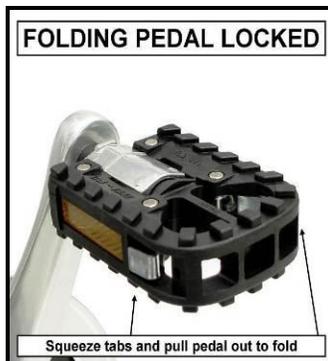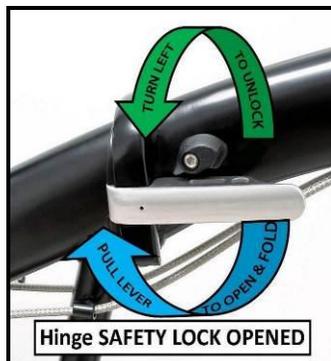

c) Familiarize yourself with your bicycle's parts

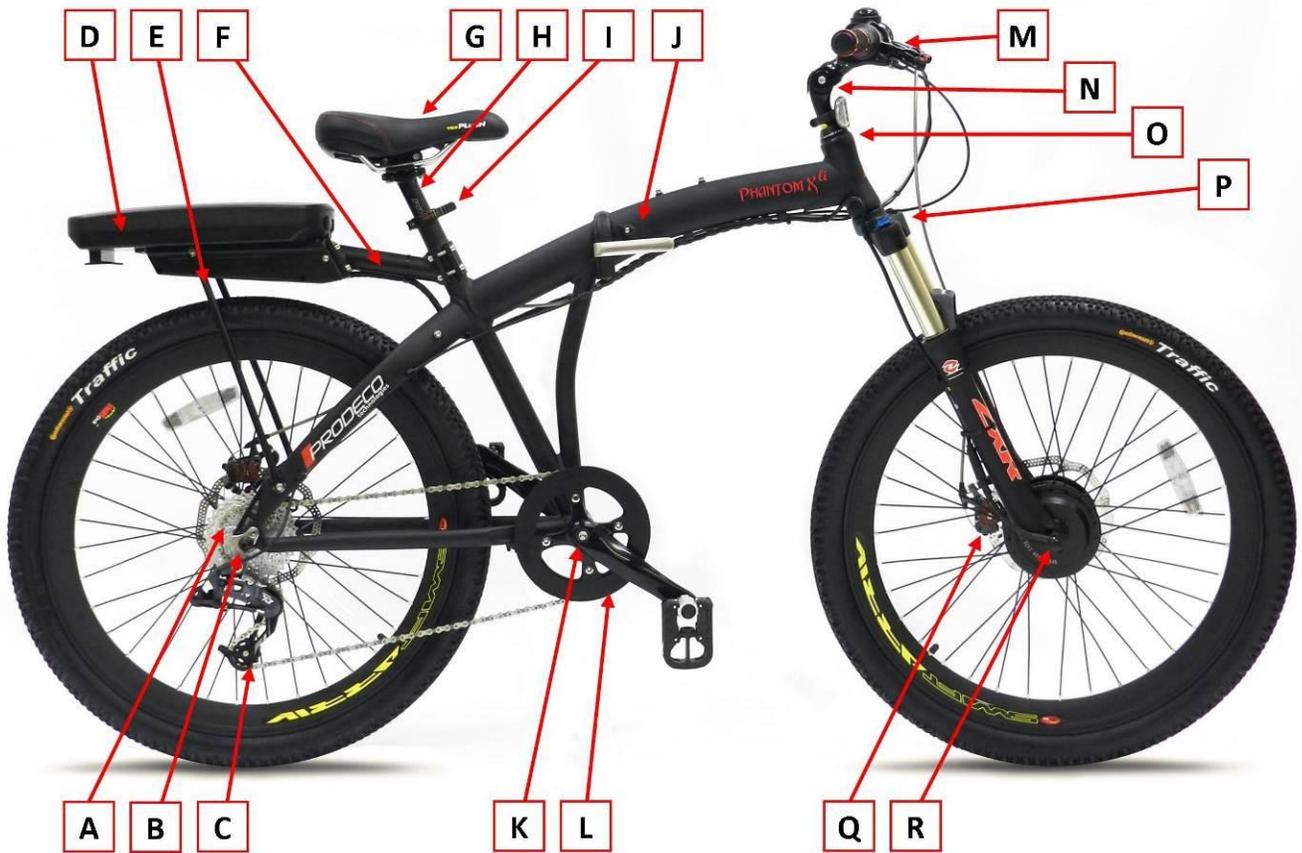

A 9 Speed Cassette	G Saddle	M Handlebar
B Quick Release Axle	H Seat Post	N Adjustable Stem
C Derailleur	I Seat Clamp	O Headset
D Sliding Battery	J Folding Hinge	P Fork Adjustment
E Battery Strut	K Bottom Bracket	Q Disc Brake
F Battery Mount	L Crankset	R Hub Motor

d) Contents of the box

Check the contents of your box. Your new Phantom X should include the following items in the box or your dealer should have included these items with your purchase:

- Phantom X electric bicycle
- Velo Plush saddle
- Prodeco Tech 36V 6Ah LiFePO4 battery
- 36V LiFePO4 charger
- Charger power cable
- 2 keys
- Multi-use nickel plated tool set
- 3 Arm Y tool (4, 5 & 6mm)
- 2 cable ties (for future use)

e) A guideline of your Phantom X tool set

The Phantom X includes a multi-use tool set. This tool set includes all the tools necessary to make adjustments and service your new bicycle. The only additional tool you will ever need is an 18mm wrench to remove the front wheel. All other tools are included with the tool kit. The tool kit includes the following tools:

- Philips Screwdriver
- Flat Head Screwdriver
- 2mm Hex Key
- 2.5mm Hex Key
- 3mm Hex Key
- 4mm Hex Key (multi & Y)
- 5mm Hex Key (multi & Y)
- 6mm Hex Key (multi & Y)
- 8mm Hex Key
- Torx 25
- Chain Pin Removal
- Spoke Nipple Wrenches

f) Registering your new bike

For the warranty to take effect, you must register your new bicycle. Registration of your electric bicycle is the only way we can acknowledge and verify the established owner. Your bicycle has 3 individual and unique serial numbers (frame, motor and battery). Each serial number must be registered when filling out the registration form. The serial number on the frame is located under the crank/bottom bracket portion of the frame. The serial number for the motor is found on the motor's side. The serial number for the battery is located on the barcode label adhered to the underside of the battery. These numbers should be recorded and registered in case of warranty issues or theft. Please review Chapter 10 "Warranty Service and Repair" section c "Registering your bicycle" how to register your Phantom X. You can register by either filling out the online registration form at www.prodecotech.com/register-your-bike/ or by sending the registration card found in Chapter 10 "Warranty Service and Repair" section d "Registration card".

Chapter 3: Basic Instructions

a) Bicycle fit

It is very important your Phantom X is properly adjusted for comfort and to avoid the possibility of losing control while riding. The saddle and handlebar have adjustments available to allow riders from 5' 6" to 6' 6" to set the proper measurements allowing for a safe and comfortable riding position. There are saddle height, rotation and distance to steering tube adjustments and also a handlebar height and rotation adjustment. If you plan to use your electric bicycle also as a traditional pedal bicycle, it is recommended you adjust the saddle height to allow for a full leg extension when pedaling. The ball of your foot when resting on the pedal should only allow for a slight bend at the knee when seated. Please review the following points in determining how to make the correct adjustments. The subsequent sections will assist you with making these adjustments.

- 1) Is your bike adjusted to your size?
- 2) To check, see Chapter 5 "Perfect Fit and Ride". If your bicycle is not properly adjusted for you, you may lose control and fall.
- 3) Is the saddle at the right height? To check, see Chapter 5 "Perfect Fit and Ride" section a "Stand over height".
- 4) Are saddle and seat post securely clamped? A correctly tightened saddle will allow no saddle movement in any direction. See Chapter 3 "Basic Instructions" section b "Adjusting the saddle" for details.
- 5) Are the stem and handlebars at the right height for you? To check, see Chapter 5 "Perfect and Ride" section c "Handlebar height and angle". If not, see Chapter 3 "Basic Instructions" section c "Installing and adjusting the handlebar stem".
- 6) Can you comfortably operate the brakes? If not, you have the ability to adjust their angle and reach. See Chapter 5 "Perfect Fit and Ride" section e "Brake lever height adjustments" for details.
- 7) Do you fully understand how to operate your new bicycle? If not, before your first ride, have your dealer or contact us to explain any functions or features that you do not understand after fully reading this manual.

b) Adjusting the saddle

You have the ability to adjust the height of your saddle instantly via the quick release clamp. There is also the ability to tilt the nose of the saddle up or down and adjust your riding position to be further or closer to the handlebar. The latter two require the use of the multi-use tool included with the purchase of your Phantom X. Please review the following details on adjusting your saddle.

To adjust the height of the saddle or remove the seat post, no tools are required. The quick release lever is opened by pulling the lever away from the seat tube allowing for the seat tube clamp to loosen the grip around the post. This will allow you to raise or lower the saddle to the desired height. There is a minimum insertion line on the seat post which must be followed and you must not extend the seat post past this mark. It is also important the seat tube clamp is tightened sufficiently around the seat post for it not to slide downwards after the quick release lever is closed. This can be accomplished by tightening the quick release nut clockwise which is located on the opposite end of the quick release lever.



▲ WARNING: *The seat post includes a minimum insertion mark. It is important you do not allow the seat post to be clamped below this mark. This mark must be inserted into the frame pass the top of quick release clamp. If clamping below this mark, it can cause the seat post to break, failure to follow this warning could result in serious injury or death.*

● CAUTION: *The seat tube quick release clamp must be checked for tightness to ensure the saddle will not accidentally slide into the seat tube when riding. This can cause a rider to lose balance and may result in a fall.*

To tilt the nose of your saddle upwards or downwards, you will need to use the 5mm hex key included with your multi-use tool kit that came with your bicycle. The saddle mounting clamp attaches the saddle to the seat post via a front and rear barrel nut and bolt. To bring the nose of the saddle down, loosen the rear bolt by 1 full counter clockwise rotation and tighten the front bolt by 1 full clockwise rotation. Check for comfort and if the nose is still too high, attempt the above step again. Continue to adjust by repeating the step above until the desired nose height is established. If you prefer to raise the nose, you can follow the above step but in the opposite direction (loosen the front bolt counter clockwise 1 rotation and tighten the rear bolt clockwise 1 rotation). **All bolts should be tightened to 140 in*lb.** (SEE PHOTOS NEXT PAGE)

● CAUTION: *The saddle mounting clamp front and rear barrel nut and bolt must remain tight at all times. Test saddle for looseness or play in the rotation of the nose. If saddle is loose, tighten the clamp bolts to ensure the saddle will not accidentally rotate up or down when riding. Both bolts should be tightened to 60 in*lb. If loose, this can cause a rider to lose balance and may result in a fall.*

Your saddle can be adjusted to be closer or further away from the steering tube/handlebar (you will need to use the 5mm hex key included with your multi-use tool kit). This adjustment is minimal but allows a 7.5mm adjustment in either direction from center mount (15mm total, close to 5/8"). To adjust the saddle closer or further, you must loosen the rear and front barrel nut and bolt set which connects the saddle rails to the saddle mounting clamp located at the top of the seat post. Loosen both bolts by rotating 2 times counter clockwise each. This should allow for sufficient looseness to slide the saddle rails in either direction on the saddle mounting clamp. You must not allow the edge of the saddle mounting clamp to meet with the saddle rail bends. The edge of the clamp must be a minimum of 5mm from the saddle rail bends. Upon establishing the correct position, tighten the saddle mounting clamp bolts 2 times in clockwise direction. Check for tightness of bolts and continue turning if loose. **All bolts should be tightened to 140 in*lb.** (SEE PHOTOS NEXT PAGE)

● CAUTION: *The saddle mounting clamp front and rear barrel nut and bolt must remain tight at all times. Test saddle for looseness or play in the rotation of the nose. If saddle is loose, tighten the bracket bolts to ensure the saddle will not accidentally rotate up or down when riding. Both bolts should be tightened to 140 in*lb. If loose, this can cause a rider to lose balance and may result in a fall.*

● CAUTION: *The edge of the saddle mounting clamp must have a minimum of 5mm of clearance from the saddle rail bends. If the edge of the clamp is mounted to close the saddle rail bends and the rider does not position themselves properly on the saddle, this could result in the rails becoming unstable due to the leverage of the riders weight. The rails can bend and can cause a rider to lose balance and may result in a fall.*




c) Installing and adjusting the handlebar stem (SEE PHOTOS NEXT PAGE)

When the handlebar and stem of the Phantom X is shipped, it is not inserted into the steerer tube. The handlebar and stem is temporarily attached to the frame with shipping ties. Using scissors, cut the ties to free the handlebar and stem from the frame. You will need to slide the stem's quill into the steerer tube and set the stem to the preferred height for riding. The steerer tube is at the inside and center of the headset. The stem quill must be inserted to the minimum insertion mark located on the side of the quill. **Before inserting the quill, confirm the forks are facing forward and the brake, shift and throttle cables are not twisted. To confirm the forks are facing forward, the front disc brake rotor should be facing the left side when sitting on the bike, the same side as the rear rotor.** To confirm the cables are not twisted, you may need to spin the handlebar. The cables should not be wrapped around the stem or handlebar and free of any type of possible restriction.

Once inserted to the desired height, remove the small plastic stem quill bolt cover and using the 6mm hex key of the Y tool, slightly tighten the stem quill bolt but not fully. You will need to align the handlebar and stem with the front wheel prior to fully tightening. To align the handlebar and stem, stand in front of the bicycle and hold the front wheel between both knees as not to allow the wheel to move. Using the grips of the handlebar, align the stem straight with the front wheel. The handlebar itself should cross the wheel from left to right in a perfect straight line and intersect the stem at a 90° angle. Once the handlebar and stem are aligned, you can now fully tighten the stem quill bolt. You will need to tighten at full force if using the Y tool. A torque wrench should be used and the stem quill bolt should be tightened to 20.8lb*ft. After tightening the stem quill bolt, reinsert the stem quill bolt cover. It is very important the stem bolt is properly tightened as not to come loose during a ride.

The stem can also be adjusted for rise. When adjusting for rise, the stem will rotate closer to the rider allowing for a more upright position. The rotation adjustment bolt is torqued and tightened at the factory prior to shipping. If adjusting the rise of the stem, you must properly tighten the rotation adjustment bolt afterwards. A loose rotation bolt can become very dangerous during a ride if the stem drops from not being properly tightened. To adjust the rise of the stem, locate the adjusting bolt on the right side of the stem. Using the 6mm hex key which is included with the multi use tool kit which came with your bicycle, loosen the rotation adjustment bolt. Pivot the stem to the desired riding position and tighten the rotation adjustment bolt. You will need to tighten at full force if using the multi use tool kit. A torque wrench is suggested and the rotation adjustment bolt should be tightened to 180lb*in.

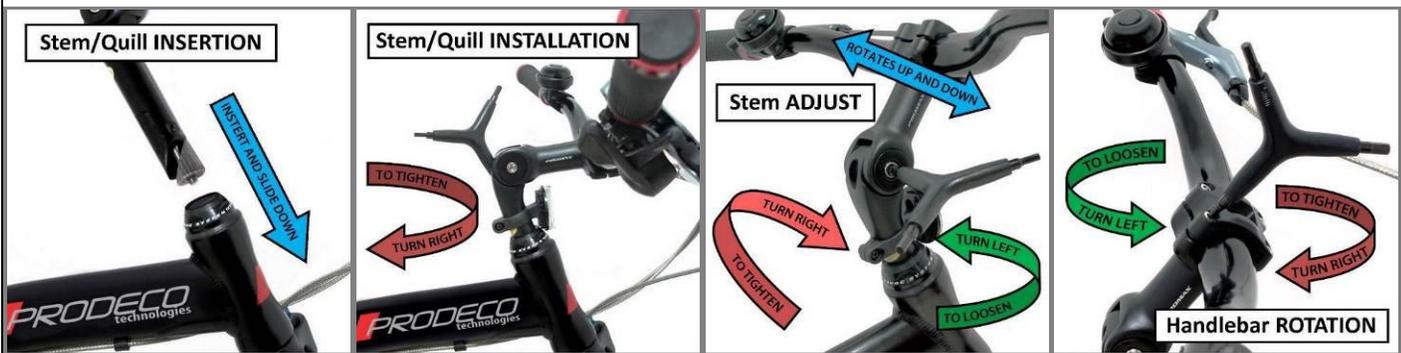

⚠ WARNING: The handlebar controls will be rotated upwards upon adjusting stem higher. Loosen the 4 stem binder bolts and rotate the handlebar downwards to a preferred riding position. Tighten stem binder bolts to 90lbs*in.

● CAUTION: The handlebar stem quill bolt and rotation adjustment bolt must be checked for tightness to ensure the handlebar stem will not accidentally slide into the steering tube or the handlebar does not turn the wheel or the stem rise falls upon riding. Failure to tighten can cause a rider to lose balance and may result in a fall.

d) Your local electric bicycle and bicycle laws

Your new Phantom X was designed to follow the federal guidelines to establish the Phantom X as a traditional pedal power bicycle within most USA states and to be allowed to ride in bicycle pathways. However, electric bicycle laws change often and you are responsible to confirm legal status of the riding of your electric bicycle in bicycle pathways. Below is a reference section on the USA electric bicycle federal guidelines:

Electric Bicycle Laws (please contact your local transportation department for the specific laws in your state and city regarding riding electric bicycles on bike pathways)

Prodeco Technologies offers the following information as guidance and does not guarantee or assure riders they are following the rules and regulations of their state.

Electric bicycle laws may vary by state to state with most states following the classification of that by the CPSC (Consumer Product Safety Commission), DOT & NHSTA. Further, the US NHSTA (National Highway Traffic Safety Administration) defines low-speed

electric bicycles (under 20mph) also as consumer products and not Motor Vehicles for safety standards. The NHSTA adheres for the most part to the CPSC guidelines. We included reference below on how electric bicycles are perceived by the Federal Government's most important agencies. We do believe new regulation and rules will apply in the future upon the electric bicycle becoming one of the standard forms of transportation for the masses. Prodeco Technologies will continue to follow new rules and guidance set forth by these agencies, always welcoming and adhering to the guidelines they feel are required to assure safety for the electric bicycle rider.

On October 22, 2008, the Federal Highway Administration (FHWA) updated the Bicycle and Pedestrian Provisions of Federal Transportation Legislation to make technical corrections and clarifications.

Below are the important updates reflecting electric bicycles:

Motorized Vehicle Use: In general, motorized vehicles are not permitted on non-motorized trails and pedestrian walkways funded under Title 23. Exceptions to this general rule exist for maintenance vehicles; motorized wheelchairs; when State or local regulations permit, snowmobiles; and electric bicycles (weighing under 100 pounds and a top speed of less than 20 miles per hour); "and such other circumstances as the Secretary deems appropriate" (except the Recreational Trails Program which specifically provides funds for motorized trails). In 2008, FHWA developed a Framework for Considering Motorized Use on Non-motorized Trails and Pedestrian Walkways to implement the "other circumstances" provision.

Prodeco Technologies only offers electric bicycles that fall under the category of "weighing under 100 pounds and a top speed of less than 20 miles per hour". According to the DOT and NHSTA, Prodeco electric bicycles meet the exception of Motorized Vehicles and therefore can be ridden on non-motorized trails and bike paths permitting state and local laws.

Framework for Considering Motorized Use on Non-motorized Trails and Pedestrian Walkways under 23 U.S.C. § 217

The purpose of this document is to provide guidance to Federal Highway Administration (FHWA) division offices and a consistent framework for determining when to permit an exception for motorized use on non-motorized trails and pedestrian walkways under 23 U.S.C. § 217(h)(5). The relevant legislation reads as follows:

23 U.S.C. § 217. Bicycle Transportation and Pedestrian Walkways (h) Use of Motorized Vehicles.--Motorized vehicles may not be permitted on trails and pedestrian walkways under this section, except for-- (1) maintenance purposes; (2) when snow conditions and State or local regulations permit, snowmobiles; (3) motorized wheelchairs; (4) when State or local regulations permit, electric bicycles; and (5) such other circumstances as the Secretary deems appropriate.

(j) Definitions.--In this section, the following definitions apply:

(2) **Electric bicycle.**--The term "electric bicycle" means any bicycle or tricycle with a low-powered electric motor weighing under 100 pounds, with a top motor-powered speed not in excess of 20 miles per hour.

(4) **Wheelchair.**--The term "wheelchair" means a mobility aid, usable indoors, and designed for and used by individuals with mobility impairments, whether operated manually or motorized.

The above **23 U.S.C. § 217** offers direction that the Prodeco Electric Bicycles are allowed on bike-paths (non-motorized trails) due to Prodeco electric bicycles falling under the classification of less than 100 pounds and under 20 mph.

HR 727

SECTION 1, CONSUMER PRODUCT SAFETY ACT

The Consumer Product Safety Act (15 U.S.C. 2051 et seq) is amended by added at the end of the following:

LOW-SPEED ELECTRIC BICYCLES

SEC. 38.(a) Notwithstanding any other provision of law, low-speed electric bicycles are consumer products within the meaning of section 3(a)(1) and shall be subject to the Commission regulations published at section 1500.18

(a)(12) and part 1512 of title 16, Code of Federal Regulations.

(b) For the purpose of this section, the term 'low-speed electric bicycle' means a two or three-wheeled vehicle with fully operable pedals and an electric motor of less than 750 watts (1 h.p.), whose maximum speed on a paved level surface, when powered solely by such a motor while ridden by an operator who weighs 170 pounds, is less than 20 mph.

(c) To further protect the safety of consumers who ride low-speed electric bicycles, the Commission may promulgate new or amended requirements applicable to such vehicles as necessary and appropriate.

(d) This section shall supersede any State law or requirement with respect to low speed electric bicycles to the extent that such State law or requirement is more stringent than the Federal law or requirements referred to in subsection (a).

SEC. 2. MOTOR VEHICLE SAFETY STANDARDS.

For purposes of motor vehicle safety standards issued and enforced pursuant to chapter 301 of title 49, United States Code, a low-speed electric bicycle (as defined in section 38(b) of the Consumer Product Safety Act) shall not be considered a motor vehicle as defined by section 30102(6) of title 49, United States Code.

Local Bicycle Laws

Most states have their own set of bicycle laws regarding traditional pedal powered bicycles. With most states recognizing electric bicycles as traditional pedal powered bicycles you must learn the applicable laws in your area. Your Department of Transportation or Cycle Clubs in your area will have the details involving riding a bicycle in your area and your city's bike pathways. Requirements for riding will change depending on location. Most cities requiring LED lights, hand signals, riding on the correct side of the road, riding behind and not parallel to other cyclist, etc. . .

e) Safety first

It is important you follow your local bicycle laws but also it is important you ride safely. Below are examples of understanding how to ride your new Phantom X safely. Always wear an approved helmet when riding your bike, and follow the helmet manufacturer's instructions for fit, use and care of your helmet.

- Do you have all the other required and recommended safety equipment for your area? It's your responsibility to familiarize yourself with the laws of the areas where you ride, and to comply with all applicable laws.
- Do you know how to correctly check your wheel axle nuts? Do you understand proper braking techniques? Is your saddle properly adjusted? How do you power your new electric bicycle? These are all questions you should have the answers to prior to riding for the first time. This USER GUIDE will answer most of the questions you have in regards to your new bicycle and assist you in ensuring your electric bicycle remains safe to ride. You should first read the USER GUIDE in its entirety and familiarize yourself with your new bicycle prior to riding.
- For further safety guidelines, please read Chapter 4: Safety

f) Mechanical safety check

Check the condition of your bicycle before every ride.

- **Nuts, bolts and straps:** Make sure nothing is loose. Lift the front wheel off the ground by two or three inches then let it bounce on the ground. Anything sound, feel or look loose? Do a quick visual and tactile inspection of the whole bike. Are there any loose parts or accessories? If so, secure them. If you're not sure, ask someone with bike experience to check.
- **Tires and Wheels:** Make sure tires are correctly inflated, see Chapter 6. Check by putting one hand on the saddle, and the other on the intersection of the handlebars and stem, then bounce your weight on the bike while looking at tire deflection. Compare what you see with how it looks when you know the tires are correctly inflated; and adjust if necessary. Are the tires in good shape? Spin each wheel slowly and look for cuts in the tread and sidewall. Replace damaged tires before riding the bike. Spin each wheel and check for brake clearance and side-to-side wobble. If a wheel wobbles side to side even slightly, or rubs against or hits the brake pads, take the bike to a qualified bike shop to have the wheel trued.
- **Brakes:** Check the brakes for proper operation. Squeeze the brake levers. Are the brakes properly releasing? All control cables seated and securely engaged? Do the disc brake pads grasp the rotors within an inch of brake lever movement? Can you apply full braking force at the levers without having them touch the handlebar? If not, your brakes need adjustment. Do not ride the bike until the brakes are properly adjusted.
- **Quick Releases:** Make sure seat post, rear axle & frame quick release levers are properly adjusted and all are in the locked position.
- **Handlebar and saddle alignment:** Make sure the saddle and handlebar stem are parallel to the bike's center line, clamped and bolts tightened enough so that you can't twist them out of alignment. If not, align and tighten them.
- **Handlebar ends:** Make sure the left handlebar grip and right throttle grip are secure and in good condition. If not, replace them.
- **Battery Pack Attachment:** Ensure your battery pack is firmly attached to your bicycle before riding. To test battery attachment, pull up on the battery pack handle after battery is locked in place. If attached properly you will not be able to slide the battery off the bike. If not, the battery pack will slide off the bike.

 **CAUTION:** *The braking of your bicycle is one of the highest concerns in safety. Proper brake lever mounting and cable adjustment is crucial for your brakes to work properly.*

 **WARNING:** *All Quick release levers must be closed and the clamps or axles tight. One loose quick release lever can cause the rider to lose control and cause serious injury or death.*

 **WARNING:** *Loose or damaged handlebar grips or extensions can cause you to lose control and fall. Unplugged handlebars can cut your body, and can cause serious injury in an otherwise minor accident.*

g) Before your first motorized ride

Before your first ride study this manual in its entirety. Make sure you are comfortable and confident when sitting on the bicycle. If an adjustment does not feel right or something feels loose, check to ensure you are properly fitted to the bike and do a mechanical safety check as explained in the previous section. Make sure you fully charge your battery with the appropriate charger included with your bicycle. Be sure to firmly attach the battery to the bicycle. Try to slide the battery off the bike by the battery handle to confirm proper installation. Read Chapter 3, section h. (the following section) again.

h) First motorized ride

When you buckle on your helmet and go for your first familiarization motorized ride on your new bicycle, be sure to pick a controlled environment, away from cars, other cyclists, obstacles or other hazards. Ride to become familiar with the brake levers against throttling, variable throttle performance while pedaling your new bike and not pedaling. The first motorized ride should be initially pedaling and then slowly pressing down on the throttle to feel the engagement of the HUB motor. Familiarize yourself with the sensation of power.

- Familiarize yourself with the braking action of the bike. To test the brakes at slow speed, shift your weight toward the rear and gently apply the brakes, rear brake first. Sudden or excessive application of the front brake could pitch you over the handlebars. Applying brakes too hard can lock up a wheel, which could cause you to lose control and fall (see section j.).
- Your bike has a front suspension system, familiarize yourself with how the suspension responds to braking application and rider weight shifts.
- Check out the handling and response of the bike; and check the comfort.
- If you have any questions, or if you feel anything about the bike is not as it should be, take the bike back to your dealer for advice or contact Customer Service at Prodeco Technologies.

i) Riding an electric bicycle

Riding an electric bike is similar to riding a non-electric bike but there are some differences to note. An electric bike is slightly heavier and requires more time to stop due to higher traveling speeds. Your bike is also equipped with a powerful motor that provides a boost noticeable when starting from a stop. The boost is exhilarating, but you must be comfortable with the sensation before riding in crowded or congested areas. To maximize battery life, assist with pedaling, engage throttle to 90% or less and add considerable coasting with no throttle to your riding. Your battery is a finite resource and proper riding techniques will prolong its distance per charge.

j) Using your twist throttle

The variable throttle on your Phantom X was designed to allow you the ability to choose the speed to ride at and determine the amount of torque off the line. The throttle operates similar to an automobile; the twisting of the throttle mimics the depressing of the accelerator. The throttle is located on the right side grip and considered a half twist throttle. It is a half twist, as only the inside portion will twist to power the bicycle. The grip itself will not twist. Using your forefinger and thumb, you can safely twist the throttle to propel the bike forward. A half twist throttle is used to avoid accidentally twisting the full grip when mounting and dismounting the bicycle. Your throttle also includes a Power ON and Power OFF button. It is the red button located underneath the LED lights. Depressing the button in activates the throttle and pressing the button out will deactivate the throttle. The ON / OFF button is for further safety. There is also an



LED set of lights which assist in determining the amount of battery storage capacity remaining. This is discussed in further detail later in the manual. Throttling is an important factor with any electric bicycle and the distance of traveling available per charge. The higher the speed, the less distance per charge, the faster you accelerate off the line, the less distance per charge. If there are multiple stops and take offs, this also affects the range of distance per charge. It is recommended you become accustomed to your style of riding and adjust the style depending on distance needed per charge. For example: if you are planning a short local trip, full throttle at takeoff and top speed will not be an issue due to your ability to be able to recharge the battery prior to the next trip. If you are planning a longer trip, 10-15 miles or more, it is suggested you add pedaling, hold throttle back 10% and whenever possible allow the bicycle to coast under no power. Coasting under no power is similar to riding a traditional pedal powered bicycle. When riding, a rider will pedal for a few seconds and then stop pedaling, allowing the bike to coast with no power being used. This will greatly increase your distance between charging. (SEE PHOTO)

k) Using your brakes

Your Phantom X is equipped with a high performance "Tool Free" adjusting Avid BB7 Disc Brake system. The BB7 front and rear disc brakes allow your new Phantom X to stop quickly and accurately. Oversized Avid HS "Heat Shedding" stainless steel disc rotors were utilized for the axles for increased heat dissipation. When properly adjusted, the Phantom X high performance disc brake system offers tremendous stopping power. Prior to leaving the factory, the Phantom X brakes were adjusted tight and properly tested. Due to cable stretching from new condition, your brakes may need to be readjusted within a few weeks of riding. Please refer to Chapter 7 "Maintenance and Replacement", section c "Brake adjustments" to adjust your brakes for optimum performance. When braking, both brake levers should be applied simultaneously. Your left brake lever manages your front brake and your right brake lever manages your rear brake. You should first become accustomed with the stopping power of each brake (front & rear). Test each brake separately in a controlled environment for their ability to stop the bicycle. Front brakes when locked can cause the rear wheel to come off the ground and the rider can be thrown off the bicycle. In emergency situations, apply pressure to each brake lever, shift your weight to the back of the bicycle and only attempt to use full force on the front brakes when the bicycle is not stopping quickly enough. Always keep a safe distance between vehicles, pedestrians and other bicycle riders from yourself.


▲ WARNING: *Locking the front wheel during braking can cause the rear wheel to lift off the ground and throw the rider off the bicycle. Both brake levers should be applied simultaneously. In an emergency situation shift your weight to the back of the bicycle. Locking the front wheel can cause the rider to lose control, be thrown off the bicycle and cause serious injury or death.*

l) Pedaling

Pedaling your Phantom X is the same as pedaling a traditional bicycle. It is recommended you add pedaling to the power of the bicycle to enhance the distance per charge. The Phantom X is a 9 speed bicycle and has the ratio of a 44T front chain ring (sprocket) against a 11-32T rear freewheel which is designed to offer an easy pedaling pace at any speed from 1 MPH to 18 MPH. It is recommended on steep inclines, the rider utilizes the throttle to assist in powering the bicycle up the incline and simultaneously drop the bicycle to a lower gear. If a rider's style of riding is throttle only with no pedaling, distance per charge will be decreased on a steep incline, the rider is required to assist the motor by pedaling to power up the incline.

m) Shifting gears (SEE PHOTO)

The shifting of gears changes the ratio of the crankset revolutions to the wheel revolutions. The lower # gears offer more pedal power torque off the line and the higher # gears offer higher speeds with less crankset revolutions. The shifting of gears does not influence the performance of the motor other than when pedaling; less stress is placed on the motor. If requiring more torque and pedaling is becoming too difficult, you will shift to a lower Gear # which results in a larger rear sprocket being engaged for a higher rotation of the crankset to the speed of the rear wheel. Gear #1 is the largest sprocket which is 32 Teeth and your lowest gear creating a 1.375 turn of the rear wheel per crankset revolution. For higher speeds from less revolutions of the crankset, you will shift to a smaller rear sprocket which would be accomplished by twisting to a higher Gear # such as 7, 8 or 9. Gear 9 is the smallest sprocket with 11 Teeth and your highest gear. One full crank rotation creates 4 revolutions of the rear wheel.

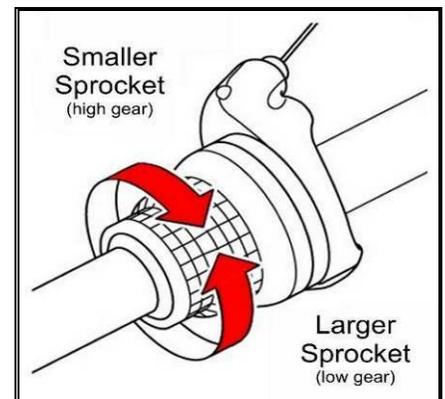

n) Watching for obstacles around you

Your new Phantom X travels at higher speeds than most riders are accustomed to, when compared to pedaling a traditional bicycle. It is very important you are aware of your surroundings and obstacles which may appear near you. You must watch the road surface you are traveling on which could cause the tires to slip or cause a flat. Examples are soft shoulders, rocks, pot holes, uneven paths, grates, construction sites. Due to the higher rate of speed when riding under motor power versus pedaling, objects will advance into your path at a faster rate. Pay attention to other riders in your area, automobiles, motorcycles, pedestrians, poles, intersections and road signs to name a few. The Phantom X resembles a traditional bicycle and people walking, driving or standing may not realize you are on a motor powered vehicle and misjudge your traveling speed.

▲ WARNING: *Hitting a pot hole, soft shoulder or other road deviation may cause you to lose control, be thrown and cause serious injury or death.*

o) Safe riding in various conditions

Riders may find themselves riding in a condition they did not plan on encountering. It is important your new Phantom X is maintained properly for optimum performance. Please read Chapter 7 on the details required to keep your electric bicycle at its best. An unexpected rain storm, snow flurry or night ride could arise during a day's trip and you should always be prepared. Please read Chapter 4 on Safety, so upon encountering an unexpected riding condition, you will be confident and ready.

p) Charging your battery

The Phantom X's battery system is the safest and latest technology in Lithium Ion battery cells and was designed to be easily charged. Chapter 8 offers a detailed explanation on battery management but the following information is a basic guide in charging your battery. The battery is a removable device and can be charged on or off the bicycle. If removing the battery to charge it, please follow these instructions.

- Locate the key ignition on the battery and turn the key in a counter clockwise rotation to the "UNLOCK" position. You must push the key in to turn from the "OFF" position to the "UNLOCK" position.
- Grab the handle at the back of battery and carefully pull towards the back of the bicycle to slide off.
- The battery is now transportable and can be charged away from the bicycle when in "UNLOCK" position.

For charging, please review the following instructions.

- Lift up the handle of the battery to access the RCA charging input.
- Insert the charging plug from the charger into the battery's RCA charging input.
- Insert the charger's power cord into a wall outlet.
- The charger's LED light will light RED while the charger is charging the battery.
- The charger's LED light will light GREEN upon the battery being fully charged.
- There is also a battery indicator for checking a full charge. Press the indicator button to display the battery's energy storage. The indicator is located on top of the battery.
- Once the battery is fully charged, you should discontinue charging and remove the charger.
- Unplug the charger's power cord from the wall and remove the charging plug from the battery.
- You are ready to install the battery pack back onto your bicycle.
- To install the battery, first align the bottom of the battery with the battery base rail.
- Once aligned, slide the battery firmly into the battery base and until the battery base terminals insert into the battery's terminal outlets. The battery's locking slots must slide properly onto the mount's 3 metal tabs.
- Once the battery is properly slid into place, you can then turn the key to the "ON" position.
- The LEDs on the throttle in the "ON" position will display a charged battery's energy capacity.

Chapter 4: Safety

The manual has detailed safety riding methods. In this chapter we will further discuss additional safety guidelines.

a) The basics

Below is a safety guideline according to the CPSC (US Consumer Product Safety Commission) in regards to riding a bike.

- Always wear a helmet to help prevent head injuries.
- Observe all traffic laws and signals, just as automobiles must do.
- Don't ride double or attempt stunts.
- Ride near the curb in the same direction as traffic.
- Find alternate routes, rather than ride through busy intersections and heavy or high-speed traffic.
- Walk -- don't ride -- your bicycle across busy intersections and left turn corners.
- Avoid riding in wet weather. When wet, handbrakes may require a long distance to stop.
- Avoid riding in the dark. If you do, be sure the bike is equipped with a headlight, a taillight and reflectors. Apply retro-reflective trim to clothing, or wear reflective vests and jackets.
- Avoid loose clothing or long coats that can catch in pedals or wheels. Leg clips or bands keep pants legs from tangling in the chain.
- Avoid crossing raised sewer grates.
- Regular maintenance is essential for safe riding. Refer to the maintenance recommendations. If you do not have basic mechanical skills, an authorized dealer should perform repairs and maintenance.
- Align (or "true") wobbly wheels for better control. Spokes also may need adjustment.
- Replace all missing, damaged, or worn parts; for example, brake pads, chainguards, chain links, spokes, screws and bolts, handlebar grips.
- Tighten and/or adjust loose parts.

- Periodically inspect frame, fork, spindles and other components for cracking.
- Parts should be adjusted to manufacturer's torque specifications.
- Inflate tires to recommended pressure, and replace worn tires.
- Lightly oil and clean moving parts. Keep oil off rubber.
- Keep bicycle indoors when not in use.

b. Riding safety

Below are guidelines according to the NHSTA (National Highway and Traffic Safety Administration) on bicycle safety.

- **Protect Your Head: Wear a Helmet** - Never ride a bicycle without wearing a properly fitted helmet. Helmets are proven to be 85-88 percent effective in preventing traumatic brain injury, the primary cause of death and disabling injuries resulting from cycling crashes. Wear a helmet that meets the U.S. Consumer Product Safety Commission (CPSC) standard (see inside of helmet for presence of a label).
- **Assure Bicycle Readiness: Ensure Proper Size and Function of Bicycle** - Make sure the bicycle fits you: Stand over the top of the Phantom X bicycle – there should be minimum 3 inches of clearance from the frame bar. Seat height — as previously mentioned, with the ball of your foot on the pedal, the fully extended leg should have a slight bend. Check all parts of the bicycle to make sure they are secure and working well: The Handlebar should be firmly in place and turns easily. The wheels must be straight and secure; the quick release rear axle must be secured.
- **Stop It: Always Check Brakes Before Riding** - Always control your speed by using your brakes. Apply the rear brake slightly before the front brake. Always keep your brakes adjusted. If you cannot stop quickly, adjust your brakes. Review Chapter 7 “Maintenance and Replacement” section c “Brake adjustments” to adjust the brakes. When your hand brake levers are fully applied, they should not touch the handlebars. Ride slowly in wet weather and apply your brakes earlier, it takes more distance to stop.
- **See and Be Seen** - Wear clothes that make you more visible. Always wear neon, florescent, or other bright colors when riding a bicycle.
- **Avoid Biking at Night** - It is far more dangerous to bicycle at night than during the day. The Phantom X requires LED lights for night time riding. If you must ride at night, you should also do the following: wear retro-reflective clothing or material, not just white or florescent, especially on your ankles, wrists, back, and helmet. Only ride in areas familiar to you. Brightly lit streets are best. Always assume you are not seen by a driver. Children should NOT ride at night.
- **Go With the Flow: The Safe Way is the RIGHT Way** - Ride on the right side in a straight, predictable path. Always go single file in the same direction as other vehicles. Riding against traffic puts you where motorists don't expect you. They may not see you, and may pull across your path, or turn into you.
- **Check for Traffic: Always Be Aware of the Traffic Around You** - Over 70 percent of car-bicycle crashes occur at driveways or other intersections. Before you enter any street or intersection, check for traffic. Always look left-right-left, and walk your bicycle into the street to begin your ride. If you are already in the street, always look behind you for a break-in traffic, then signal before going left or right. Watch for left or right turning traffic.
- **Learn Rules of The Road: Obey Traffic Laws** - Bicycles are considered vehicles. Bicyclists must obey the same rules as motorists. Read your State drivers handbook, and learn and follow all the traffic signs, laws, and rules for operating a vehicle on the road. Always signal your moves. Be courteous to pedestrians and other vehicle operators. *Never wear headphones* while riding as they impair your ability to hear traffic. Become familiar with the accommodations that are available for bicyclists in your area. These include bicycle lanes and routes as well as off-road paths. Take advantage of these whenever possible.
- **“Drive” with Care: Share the Road** - When you ride, consider yourself the driver of a vehicle and always keep safety in mind. Choose to ride in the bike lane, if available. If the roadway or bike lane is wide, ride to the right; if the lane is narrow, you may choose to ride in the middle of the lane. Take extra precautions when riding on a roadway. Bicycles are smaller than automobiles, and don't protect the operator like an automobile. You should: Make eye contact, smile, or wave to communicate with motorists. Courtesy and predictability are a key to safe cycling; be considerate and aware of motorists and pedestrians. Learn to anticipate their actions. Remember, pedestrians have the right of way; Ride far enough away from the curb to avoid the unexpected from parked cars (i.e. opening doors or drivers pulling out without checking); Keep control of your bicycle: look behind you while maintaining your bicycle in a straight path; be able to ride with one hand on the handlebars and signal a turn. (Practice these skills in a parking lot); Always look over your shoulder, and if possible, signal before changing lanes; Make sure that books, clothes, and other items are securely attached to the bicycle or carried in a backpack; and Use bells, horns, or your voice to alert pedestrians and bicyclists that you are approaching or passing.
- **Stay Focused: Stay Alert** - Never wear headphones; they hinder your ability to hear traffic. Always look for obstacles in your path (potholes, cracks, expansion joints, railroad tracks, wet leaves, drainage grates, or anything that could make you fall). Before going around any object, scan ahead and behind you for a gap in traffic, signal your intentions to move, and then follow through with your intentions. Be aware of the traffic around you. Ride defensively. Use extra care when riding in wet weather, ice, frost, or snow. Slow your speed and allow extra time and space to stop. Use extra care when crossing bridges which are extra slippery under wet conditions. Use caution when crossing a railroad track; cross tracks at a 90-degree angle and proceed slowly.

c) Wet weather riding

Whenever possible, you should avoid riding your bicycle in the rain. Riding a bicycle in the rain is like driving a car in the snow. You will not be able to stop as fast and must leave a larger distance between you and the obstacles around you. Your brakes will not work as efficiently when they are wet. You will not be able to turn as sharp without the danger of slipping. You must also ride away from or be cautious around painted lines, pot holes, sewer or drain grates, rail road crossings, bridges, wet leaves and any other area where a slippery surface can appear with water. Keep an eye out for puddles and turn your lights on if you have them. If you live in an environment where rain riding is expected, you should install front and rear fenders if you have not already done so. Use a cover for your bicycle if leaving it outdoors. Extensive rain can seep into the controller and battery and cause water damage.

d) Reflectors

The CPSC (US Consumer Product Safety Commission) requires front, rear, wheel and pedal reflectors. Your Phantom X includes federal regulated reflectors and they should not be removed. If needing to be replaced, replace them with authorized Prodeco reflectors or reflectors approved by the CPSC.

e) Night riding

Almost anywhere in the world today, bicycle night riding requires front and rear lights on your bicycle. You must install front and rear lights if you plan on riding at night. Check your local laws on what is required for night riding. Always wear retro-reflective clothing or material, not just white or florescent, especially on your ankles, wrists, back, and helmet. Only ride in areas familiar to you. Brightly lit streets are best. Always assume you are not seen by a driver. Children should NOT ride at night.

f) Adding accessories

When adding accessories to your bicycle you must check to confirm they do not lower the safety value of your bicycle. Prodeco Technologies offers authorized accessories for your bicycle which have been approved not to lower the safety value. Ask your authorized dealer or contact us if you are not sure about adding an accessory to your bicycle and the possibility of lowering your bicycle's overall safety.

Chapter 5: Perfect Fit and Ride

It is very important your new Phantom X is adjusted properly for your size and for comfort. The Phantom X has multiple adjustments available to offer a comfortable and safe position for riding. A properly sized and adjusted bicycle allows the rider to remain fully alert and avoid injury. Review this chapter carefully and all the adjusting points of your new Phantom X. If you have difficulty in obtaining the most comfortable riding position or performing available adjustments, contact your authorized dealer for advice. You can contact Prodeco Technologies directly by phone or email and we will assist you with the proper adjustments for your bicycle and your size. The following list is the areas of adjustability the Phantom X offers:

- Saddle height
- Saddle nose angle
- Saddle distance to handlebar
- Handlebar height
- Stem rise and rotation
- Brake lever angle
- Brake lever reach
- Fork suspension firmness

a) The basics

Understanding the basics of a bicycle frame size will help in determining the correct positions and adjustments for your body size and comfort. The Phantom X's frame was designed to easily accommodate all riders from 5' 6" to 6' 6" utilizing the available adjustments. The frame size can be considered anywhere from an 18" to 23" if comparing to traditional measurements. The most important information to remember when sizing your bicycle is that you are comfortable riding, especially when pedaling. With throttled electric bicycles some riders may choose not to pedal and the measurement will be different than for a rider who chooses to pedal and is the same size. Scooters for instance have a much lower saddle height than bicycles due to scooters not being pedaled. A higher saddle height is only recommended for riders who pedal allowing them a full extension of their leg per rotation of the crank.

b) Frame size

The Phantom X is considered an 18" MTB frame. The typical measurement number used today in choosing a correct frame size for a rider is the seat tube length. This number usually is between 17" to 19" for categorizing MTB bicycle measurements. The seat tube length is measured from the centerline of the crank (bottom bracket) to the top of the seat tube (seat tube clamp). There is another measurement sometimes forgotten which is actually more important and this is the top tube length (seat tube to the steering tube). With the Phantom X's stem being available adjustable, fine tuning of this measurement is easily accomplished.

The Phantom X's frame measurement follows the principals of an 18" MTB frame; however the actual measurement will differ from traditional bicycle frames. This is due to the seat tube being longer than a traditional bicycle. The addition of the battery mount required an extension to the seat tube by 2 inches; therefore the measurement is 20". The Phantom X further has a high rake seat tube angle. With the high angle seat tube, as a tall rider raises their saddle to accommodate their longer legs, the saddle will pull back offering a longer distance to the steering tube.

c) Recommended sizing

In today's bicycle industry, the top tube length is actually more important than the seat tube length. With seat posts now available over 300mm, the seat tube length is no longer the most important number. The distance of the bottom bracket to the road should also be taken into consideration when sizing a bike. The top tube length is traditionally the distance from the center of the seat tube to the center of the steering tube. For purposes of sizing the Phantom X, we will name the distance of the center of the saddle to the center of the handlebar the steering length (similar to the top tube length).

You can adjust the steering length of your Phantom X by establishing the saddle position and handlebar height combined with the adjusting of the stem rise via rotation. The saddle position can be adjusted for height and distance from the steering tube via the quick release clamp and the saddle clamp. Keep in mind by increasing the height of the saddle, this will also increase the steering length due to the angle of the seat tube. If you choose to use your bicycle as a scooter style vehicle only, you should establish saddle height at a lower position to reduce the center of gravity. Saddle height can be reduced to just above your inseam. Your inseam is the measurement of the inside of your leg.


d) Control position adjustments

The Phantom X includes a twist variable throttle with an LED battery indicator on the right side and an 9 Speed twist shifter on the left side of the handlebar. There is also a thumb sliding lever bell on the left side of the handlebar, required by law for electric bikes as a sounding device. The throttle can be adjusted on the handlebar to rotate further up or down (you will need to use the 3mm hex key included with your multi-piece tool kit). The shifter can be adjusted on the handlebar to rotate also (using the multi-tool included with the bicycle). The brake lever assembly and throttle mount together and at a certain point of rotation, one will not rotate further without the other requiring to be rotated. If the factory settings on the throttle or shifter are uncomfortable for you or you cannot view the LED battery, you can loosen the throttle clamp and move it into a preferred position. As stated above, you may have to loosen the brake assemble to move the throttle to your desired position. Please see section e "Brake lever height adjustments" following this section to loosen and adjust the brake lever assembly and maintain correct brake lever height adjustments. To loosen and adjust the throttle, locate the 3mm hex bolt at the front underside of the LED battery indicator on the throttle. Use your 3mm hex key and insert it into the hex bolt and rotate a minimum of 3 times counter clockwise. The throttle will now be loose enough to move. **Throttle clamp bolts should be tightened to 25 lb*in.**

Your Phantom X includes a thumb lever bell for you to use to warn other people around you when approaching. The thumb lever bell can be moved to a more comfortable position if the factory setting is unsatisfactory (you will need to use the Philips screw driver included with your multi-piece tool kit). On the underside of the bell handlebar clamp there is a small Philips screw. Using the Philips screw driver, turn the screw counter clockwise 4 rotations to loosen the clamp. This will allow the bell to be moved. Move the bell to the desired position and using your Philips screw driver, tighten the clamp screw by turning clockwise until tight.

e) Brake lever adjustments

The Phantom X utilizes an Avid Speed Dial 7 Lever. The following instructions will explain how to adjust your lever for optimal comfort and performance. The preferred level of the brake lever assembly itself will vary from rider to rider. The brake lever can be rotated higher or lower to a desired riding position. The optimal position can be found by extending your fingers straight while sitting in the saddle. Your fingers, when extended straight, should rest on top of the levers or slightly above the levers. The clamp has a **CLAMP BOLT** accessible from the top of the bracket. Using the 4mm hex key, loosen the brake lever assembly by turning the hex bolt counter clock wise 3 full turns. The lever assembly will now be loose and you can rotate it up or down to establish the preferred position to apply the brakes while riding. The brake lever assembly on the right side of the handlebar may require the throttle clamp to be loosened to allow the brake lever assembly to rotate. The brake lever assembly and throttle mount together and at a certain point of rotation, one will not rotate further without the other requiring to be rotated. A compromise may be required when attempting to align the brake levers and establishing the preferred throttle position. Your brake lever should be located at the point where your fingers extend straight out from your arms. Upon finding preferred brake lever height, tighten hex bolt using 4mm key. **Brake lever clamp bolts should be tightened to 80 lb*in.**

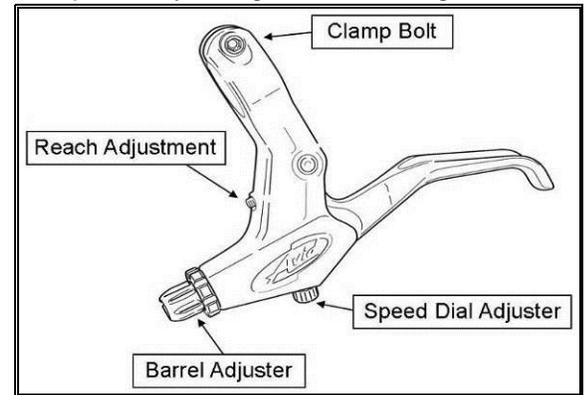

If you have small hands, you can adjust the reach of the lever by adjusting the **REACH ADJUSTMENT** bolt. The speed dial 7 brake lever also incorporates a **SPEED DIAL** which sets the feel you want from softer (greater modulation) to a firmer feel. Turn counter clockwise for a softer feel and clockwise for a firmer feel.

The Cable adjustment can be tightened via the **BARREL ADJUSTER**. The Barrel Adjuster removes slack in the cable and can tighten the outboard pad of the brake caliper. The Barrel Adjuster however is strictly reserved for cable slack removal on the fly. The adjustment of the pads should be done at the caliper itself.

f) Suspension fork adjustment

The Phantom X uses a dual pre-load adjustable suspension fork. The fork's dual adjustment offers either a softer or firmer ride for smoothing out the bumps in your path. The pre-load can be adjusted according to your weight and liking. You can easily adjust the suspension performance by rotating the knobs at the top of each leg at the crown.



Chapter 6: Tire, Tube, Wheel and Axle Repair

The Phantom X was designed for ease of servicing. Repairs are no more difficult than on a traditional bicycle. Any neighborhood bicycle shop should be able to repair a flat, change a tire or replace a wheel. Please review the following chapter on how to remove and replace the front and rear wheel of your Phantom X.

a) Removing the front motor wheel


The front motor wheel incorporates a quick disconnect motor wire harness for removing the wheel. To remove the wheel following these instructions, it will only take a few minutes. Read the instructions before first attempting to remove the wheel.

- First, turn the battery ignition key to the "UNLOCK" position and remove the battery.
- To work on your bicycle, it may be easier to turn the bicycle upside down by placing blankets on the ground and resting the bicycle on the saddle and handlebar.
- Locate the motor disconnect weather proof plug on the left side of the bike frame 6 inches from the motor axle and separate the connector.
- Locate the cable tie which ties the motor wire to the frame. Cut the cable tie with snips.
- On each axle nut there is a rubber nut protector, remove these protectors simply by pulling on them. On the wired side of the axle, slide the rubber protector up the wire only a few inches.
- Using an 18mm wrench, turn counter clockwise each axle nut until the axle nuts and washers are clear from the fork.
- Remove the wheel from the fork by pulling on the wheel while making sure the washer

b) Installing the front motor wheel

The front motorized wheel easily installs onto the fork dropouts within a few minutes. Follow the instructions below on installing the front motor wheel. Additional cable ties are included with the Phantom X. One cable tie will be needed to install the motor. Read the instructions fully before attempting to install the wheel. (SEE PHOTOS NEXT PAGE)

- Slide the motor into the fork drop outs by aligning the axle into the dropouts. The axle has flat edges which require the axle to enter the dropouts with the flat edges facing front and back. The axle with the motor wire protruding is to enter the left side dropout (the left side is when standing behind the fork).
- Each axle side has 2 washers and a nut. Slide the washers into the fork dropout safety flange and tighten nuts by hand.
- Using an 18mm wrench, fully tighten axle nuts. Axle nuts should be tightened to 250 lb*in.
- Plug motor connection by aligning arrows on each end of the connector and slide together.
- Once connectors are plugged, you must test connection. Install the battery as described in Chapter 8 "Battery Management" section c "Installing and locking the battery". Turn the ignition key to "ON" at the battery base. LED lights on throttle will light up displaying power to the motor. Pull the front motor wheel off the ground (if the bicycle is not turned upside down) and turn the throttle to test the motor. If the motor turns, the connection is solid. If motor does not turn, turn key to "OFF" position at battery and then check the motor connector to ensure a solid connection has been made. Test again after checking.
- After confirming a solid connection, use the cable tie to connect the motor cable to the side of the suspension fork and once tightened, cut off the extended amount.

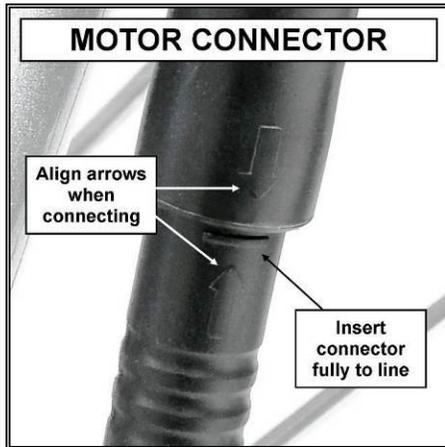

c) Removing and installing the rear wheel



The rear wheel on the Phantom X can be removed or installed without tools. A quick release skewer through a hollow axle is utilized for easy and quick wheel removal. A quick release skewer is a rod that has a threaded acorn nut on one end and a cam lever assembly on the other end. The cam lever applies pressure and locks the axle in place. The majority of higher quality bicycles produced in the last decade incorporates this design.

When removing the wheel, it will be easier to turn the bicycle upside down and rest the bicycle in its saddle and handlebar. Place a few blankets on the ground as not to scratch the saddle or handlebar controls. To remove the wheel, follow these steps:

- Prior to removing the wheel, shift the bicycle into gear 8 or 9 (the small COG/sprocket on the rear cassette. It will be easy to remove the wheel if the chain is at the end of the cassette. Make sure to spin the crank while shifting gears.
- Locate the quick release lever on the left side of the bicycle (opposite the chain side) and pull the quick release lever open and away from the frame.
- The quick release lever being opened will loosen the grip on the frame and the wheel will now slide out easily from the dropouts with a few light taps.
- The 9 speed cassette mounted to the free body hub can be slid out from the chain with no issue. The spring of derailleur may cause the lower pulley to get in the way of removing the wheel. Simply pull the pulley out of the way.

When installing the wheel, it is basically opposite of the above "removing the wheel". Follow the below instructions on installing the wheel:

- Pull or push the rear derailleur lower pulley with chain out of the way of the drop outs.
- Now check to make sure the chain is not in the way and align the wheel above (below if bike is on kick stand and not upside down) the dropouts and pay attention to the lining up of the disk brake rotor into the brake caliper (between the pads).
- Prior to inserting the wheel into the dropouts, pull the chain onto the cassette.
- Slide the wheel axle into the frame dropouts.
- Once the wheel is in the dropouts, confirm they are completely mounted in the dropouts with no space.
- Install the axle quick release skewer if it is not installed. With quick release lever fully open, tighten acorn nut until a slight resistance.
- Once tightened, close the quick release lever with force to clamp and lock the axle into the dropouts. The force must be strong enough for the axle not to become loose later. It should take some effort to close the lever but not so much that you are straining or feel you are damaging the quick release. You should not be able to open the quick release lever with 1 finger.
- Test to see if the quick release lever will open with 1 finger, if it opens you must perform the previous step again until the quick release lever clamp is tight.

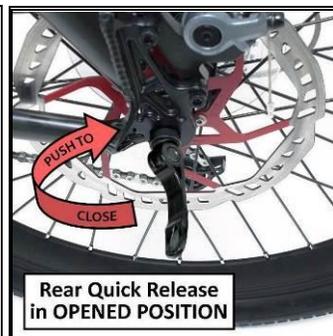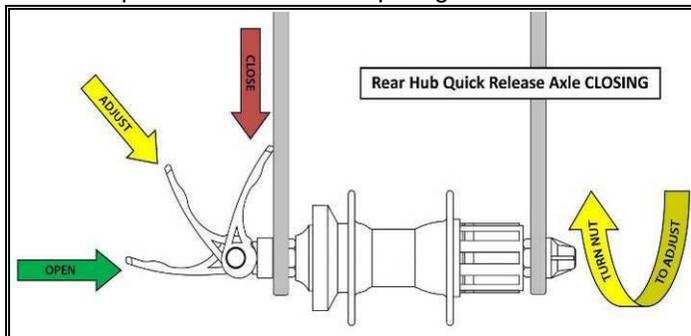

d) Replacing a tube or tire

Read the previous sections a. and b. to learn how to remove and replace the front and rear wheel. You will need to understand how to remove the wheel prior to replacing a tube or tire. This section only explains how to remove the tire from the rim and how to replace a tube.

Before explaining how to replace a tube and tire, details on the Phantom X's tubes and tires are discussed. Tubes and tires are 2 of the most important components on your new bicycle and must always be in optimum condition. It is important you understand about the tubes and tires equipped on your bicycle.

The Phantom X uses high-performance Continental Traffic Low Resistance UNI-Directional tires with a 65 PSI rating. Bicycle tires are available in many designs and specifications, ranging from general-purpose designs to tires designed to perform best under very specific weather or terrain conditions. If, once you've gained experience with your new bicycle, you feel that a different tire might better suit your riding needs; your dealer can help you select the most appropriate design.

The size, pressure rating, and on some high-performance tires the specific recommended use, are marked on the sidewall of the tire. The most important part of this information for you is Tire Pressure. The best and safest way to inflate a bicycle tire to the correct pressure is with a bicycle pump that has a built-in pressure gauge.

▲ WARNING: *Never inflate a tire beyond the maximum pressure marked on the sidewall. Exceeding maximum pressure may blow the tire off the rim, causing damage to the bike and injury to the rider and bystanders.*

▲ WARNING: *There is a safety risk in using gas station air hoses or other air compressors. They are not made for bicycle tires. They move a large volume of air very rapidly, and will raise the pressure in your tire very rapidly, which could cause the tube to explode.*

Tire pressure is given either as maximum pressure or as a pressure range. How a tire performs under different terrain or weather conditions depends largely on tire pressure. Inflating the tire to near its maximum recommended pressure gives the lowest rolling resistance; but also produces the harshest ride. High pressures work best on smooth, dry pavement. Very low pressures, at the bottom of the recommended pressure range, give the best performance on smooth, slick terrain such as hard-packed clay, and on deep, loose surfaces such as deep, dry sand. Tire pressure that is too low for your weight and the riding conditions can cause a puncture of the tube by allowing the tire to deform sufficiently to pinch the inner tube between the rim and the riding surface.

● CAUTION: *Pencil type automotive tire gauges can be inaccurate and should not be relied upon for consistent, accurate pressure readings. Instead, use a high quality dial gauge.*

Ask your dealer to recommend the best tire pressure for the kind of riding you will most often do, and have the dealer inflate your tires to that pressure. Then, visually check inflation by sitting on the saddle with your weight and noticing your tires response. You should also squeeze tires and feel resistance so you'll know how correctly inflated tires should look and feel. Some tires may need to be brought up to pressure every week or two. Other high-performance tires may also have unidirectional treads, similar to the factory tires on your Phantom X: their tread pattern is designed to work better in one direction than in the other. The sidewall marking of a unidirectional tire will have an arrow showing the correct rotation direction. When replacing your tires with tires that are unidirectional, be sure that they are mounted to rotate in the correct direction.

There are two kinds of bicycle tube valves: The Schrader or Presta Valve. The air pump you use must have the appropriate fitting for the correct valve stem. The Phantom X uses Schrader valves. The Schrader valve is the same as an automobile. To inflate a Schrader valve tube, remove the valve cap and clamp the pump fitting onto the end of the valve stem. To let air out of a Schrader valve, depress the pin in the end of the valve stem. The Presta valve has a narrower diameter and is only found on bicycle tires. To inflate a Presta valve tube using a Presta headed bicycle pump, remove the valve cap; unscrew (counterclockwise) the valve stem lock nut; and push down on the valve stem to free it up. Then push the pump head on to the valve head, and inflate. To inflate a Presta valve with a Schrader pump fitting, you'll need a Presta adapter (available at your bike shop) which screws on to the valve stem once you've freed up the valve. The adapter fits into the Schrader pump fitting. Close the valve after inflation. To let air out of a Presta valve, open up the valve stem lock nut and depress the valve stem.

▲ WARNING: *Patching a tube is an emergency repair. If you do not apply the patch correctly, the tube can possibly fail, which could cause you to lose control and fall. Replace a patched tube as soon as possible.*

To remove a tire or tube, follow these instructions (you will need tire levers or a similar tool to hold open the bead of the tire):

- Let all the air out from the tube of the wheel having the replacement.
- Remove the wheel as described in detail in the previous sections.
- Remove the inner tubes air valve cover.
- Pull back the tire bead away from the rim. You will see the tube and the inside of the tire. If it requires too high pressure to pull back the tire bead, there may be still air in the tube. Check to confirm all the air is out of the tube.
- Using 2 tire levers or similar tools, insert one lever end in between the tire bead and the rim but make sure the lever is on top of the tube and you are not pinching the tube.
- Slide the second lever about 4-6 inches to the side of the first lever. Be sure not to pinch the tube and to confirm you have the lever on top of the tube and not under the tube. Slide the lever down the side of the wheel between the tire bead and rim edge while lifting the tire bead and sidewall over the rim edge.
- If removing only the tube, you can now pull the tube outside the side of the tire wall. If replacing the tube, you can now install the new tube.
- If removing the tire, use the tire levers and repeat the previous steps and remove the opposite side of the tire's sidewall bead on the same side of the rim you removed the first tire bead. The tire may easily come off the rim if you pull the tire bead over the edge of the rim and the tire levers may not have to be used.

To install a new tire, follow these instructions:

- When installing a new tire you should first insert the tube into the tire. The tube should have been partially inflated to a soft but full feel removing any wrinkles in the tube.
- Check the mounting side of the rim and confirm the directional path of the tire. High performance tires are usually directional tires and the arrow on the sidewall represents the rotation of the tire.
- Place the valve of the tube into the valve hole of the rim and slide the bead of the tire over the edge of the rim.
- Push the one side wall and bead of the tire around the edge of the wheel's rim. The tire will slide into place and may become tight as you finish.

- Once one side of the tire is inserted in the rim, check to make sure the valve stem lines up properly and the tube is smooth across the rim and inside of tire. The tube should not be bunched up in any area.
- Where the tube valve is, slide the second wall and bead of the tire into the edge of tire rim. Follow pushing the tire wall and bead into the inside edge of the rim.
- You will get to an area of only a few inches left and you will need to apply pressure to push the tire side wall and bead behind the edge of the rim.
- Once the tire is fully inserted, check for any areas on both sides if the tube is exposed. The tube must not get trapped between the tire bead and rim edge.
- Locate the tube valve and use your hand to push on the tire on the outside of the valve to help push the valve further out through the rim.
- Fill the tube with 50% air and then check the tire bead and rim edge again to see if the tube is protruding anywhere. Once you confirm the tube is not protruding, you can fill the tire to your desired air pressure.
- You are now ready to install the wheel back onto the bicycle according to the previous sections.

Chapter 7: Maintenance and Replacement

Your new Phantom X was designed for ease of use and owner servicing. There are no tasks which require advanced skills. Most maintenance and replacing of parts were designed to be accomplished by the typical bicycle rider. Please read this section to learn how to keep your Phantom X performing like new.

a) Keeping your bike clean

Your new Phantom X is an outdoor friendly electric bicycle but should be kept clean and free from dirt. Dirt on and around seals and drive train components can cause premature wear and dirt on paint and part finishes can cause premature aging. If storing your bicycle outdoors under the elements, you must keep it covered with a high quality bicycle cover to avoid rain, snow or dirt damaging your new bicycle.

To clean your bicycle, follow these instructions:

- Your bicycle incorporates electrical components; it is advised when washing your bicycle you should first cover the throttle and battery base. Use a plastic bag or a piece of plastic wrap to cover the components. Place the bag or wrap around the complete throttle assembly and use a rubber band or tape to secure. The battery should be removed prior to cleaning and a plastic bag or wrap secured by tape can be used to cover the battery base. If you are planning for a ride after washing, it is recommended the saddle also be covered. The saddle has miniature holes where there is stitching and water can seep into these small holes.
- To wash your bicycle you will need a small bucket of warm water with car soap, sponge, small brush, chain lube and a few rags or towels.
- Rinse your bicycle off with a light spray of water to remove any dirt on the surface. Using the sponge and warm soapy water, wash the frame and frame components which include the forks, handlebar and seat post. Start from the top of the bicycle working your way down.
- Once the frame is washed, use the sponge to clean the motor, spokes, chain guard and rims.
- The tires, pedals, crankset and chain will be the remaining items needing to be washed. Use the brush first on the tires and then the pedals. Rinse the brush and then using the warm soapy water, clean the chain ring, freewheel and finally the chain. If the chain and drive train are very dirty or greasy, a bicycle degreaser should be utilized.
- After washing, spray the bicycle down with fresh water.
- Use the rags or towels to dry off the bicycle. Start by drying the frame first, followed by the components, the wheels, tires and then the drive train.
- Once the drive train is dry, use a chain lube to lubricate the chain.

b) Avoid scratching your bike

Your new Phantom X is a high quality bicycle has been designed to withstand the elements by utilizing stainless steel, anodized and painted aluminum alloys, brass plus galvanized or painted metals. Stainless steel and brass are used in their natural forms and can withstand the elements with no additional protection required. The majority of your bicycle however is fabricated from aluminum alloys which have either a painted finish or have been anodized. Aluminum does not rust but can discolor and corrode over time. The frame has a 3 layer paint finish which protects the aluminum and graphics. Components such as the handlebars, crank arms, chain guard, seat post and more have been anodized through an electrolytic process which increases corrosion and wear resistance. If the frame or components become scratched, these items could slightly corrode around the scratched area. Depending on the care of your bicycle, a scratch could take month or years for corrosion to appear. To maintain future value and years of beauty, it is best to be careful when folding and moving your bicycle not to scratch the metal surfaces. If a surface is scratched, use clear nail polish or black nail polish to cover and seal the scratch.

c) Brake Bed-In and adjustments

Both brakes on your Phantom X are high performance Avid BB7 disc brakes. The front and rear brakes includes inboard and outboard "Tool Free" adjusting knobs. They have powerful stopping power but must be properly adjusted. Adjusting your brakes will be required from time to time due to either the brake pads wearing or the brake cables stretching. Both front and rear brake systems are easy to adjust with multiple adjusting points. Please follow the instructions below on how to adjust your brakes. You can also review the included Avid BB7 guide included with your starter kit. If you are unsure as to a component or installation procedure, please contact your local authorized dealer or Prodeco Technologies.

AVID SAFETY INFORMATION

Brakes are a safety-critical item on a bicycle. Improper setup or use of brakes can result in loss of control or an accident, which could lead to a severe injury.

Avid brakes are a performance product that offers increased stopping power over brakes that you may be used to. This greater power requires less effort to lock-up a wheel when braking. A wheel lock up might cause you to lose control and possibly cause injury.

It's your responsibility to learn and understand proper braking techniques. Consult the owner's manual for your bicycle and a professional bike dealer.

ALWAYS RIDE UNDER CONTROL

Remember, it takes longer to stop in wet conditions. To reduce the possibility of an accident and minimize trail erosion, you should avoid locking-up your wheels.

FOLLOW THESE INSTRUCTIONS CAREFULLY

If you do not understand the instructions, have the adjustments done by a professional bicycle mechanic.

Disc brakes are OIL SENSITIVE! Do not spray any solvents or lubricants in the vicinity of the rotors or brake pads. NEVER touch the pad surface or rotor surface with your fingers. Doing so will significantly degrade braking performance.

AVID WARNING

Do not touch the braking surface of any rotor with your bare hands, because the oils from your fingers will degrade its performance. Always wear gloves, or handle the rotor by its spokes. Disc brakes become very hot during use. Do not touch the caliper or rotor immediately after use. Make sure the brake has cooled down before making any adjustments.

DISC BRAKE PAD AND ROTOR BED-IN PROCEDURE

All new brake pads and rotors should be put through a wear-in process called 'bed-in'. The bed-in procedure, which should be performed prior to your first ride, ensures the most consistent and powerful braking feel along with the quietest braking in most riding conditions. The bed-in process heats up the brake pads and rotors which deposits an even layer of brake pad material (transfer layer) to the braking surface of the rotor. It is this transfer layer that optimizes braking performance.

⚠️ WARNING:

The bed-in process requires you to perform heavy braking. You must be familiar with the power and operation of disc brakes. Braking heavily when not familiar with the power and operation of disc brakes could cause you to lose control of your bicycle, which could lead to a crash and could lead to serious injury and/or death. If you are unfamiliar with the power and operation of disc brakes, you should have the bed-in process performed by a qualified bicycle mechanic.

🔑 IMPORTANT:

To safely achieve optimal results, remain seated on the bike during the entire bed-in procedure.

1 Accelerate the bike to a moderate speed, then firmly apply the brakes until you are at walking speed. Repeat approximately twenty times.

2 Accelerate the bike to a faster speed. Then very firmly apply the brakes until you are at walking speed. Repeat approximately ten times.

🔑 IMPORTANT:

Do not lock up the wheels at any point during the bed-in procedure.

3 Allow the brakes to cool prior to any additional riding.

FINE TUNING

Before each ride

Check cables for signs of wear or fraying. Squeeze the brake lever firmly and check for proper brake function. Adjust for pad wear if necessary. Check pads for wear and replace if necessary. Ensure rotors are free of foreign substances and oils.

Cable Slack Adjustment

Use the barrel adjuster on the brake lever to remove any cable slack from the system. Turn the adjuster out until there is no free play in the lever but not so far that the torque arm on the caliper is advanced. The torque arm should return completely when the brake lever is released. If necessary, repeat pad adjustments. Note: new cables will stretch and require adjustment.

Pad Break In and Noise

It may take anywhere from 20 to 40 complete stops to break in Avid pads. You may begin to notice an increase in braking power after the first ride. Brake noise can occur not only during the break-in period but off and on throughout the life of the brake pads. Noise is dependent upon factors such as brake setup, rider weight, riding style, braking style, and riding conditions (i.e. dust, soil, and contamination of friction surfaces).

Care and Cleaning

Extreme care must be taken when cleaning both the bicycle and its new disc brakes. Under normal use, it is not necessary to clean the caliper rotor or pads. If necessary, use only water and dish detergent to wash the caliper and rotor being sure to thoroughly rinse all soap residues from the rotor. Dry with a clean paper towel.

Spring Tension Adjustment

If necessary, spring tension can be adjusted by turning the spring tension adjustment screw with a 2.0mm hex wrench. Turning the screw clockwise increases spring tension, which equals harder lever pull.

Pad Wear Adjustment

Over time, you will need to compensate for brake pad wear. You can do so with two very simple adjustments: Turn both the inboard and outboard red adjusting knobs clockwise one or two clicks as needed to restore your brake to optimum settings. DO NOT use your barrel adjuster to compensate for pad wear. A pad wear indicator is at the center of each knob. As the knob is turned in, the indicator will retract deeper into the knob giving a visual indication of approximately how much the pads have worn.

d) Brake pad replacement

A pad should be replaced when its total thickness (backing plate and friction material) is less than 3mm. **1. REMOVE THE OLD PADS** - Back both adjuster knobs all the way out (counterclockwise,) then squeeze the pad tabs together and pull both pads straight out of the caliper. **2. INSTALL THE NEW PADS AND SPRING** - Assemble the spring between the new left and right pads. Align the spring to the pad as shown. Squeeze the brake pad/spring clip assembly together then press firmly into the caliper until it "clicks" into place. The pad marked "R" goes on the spoke side of the brake.

Installing the Cable









Pass the brake wire through the anchor bolt on the actuating arm. Cable slack may be removed with a fourth hand tool. Be careful not to advance the torque arm as you pull the cable. Tighten cable anchor bolt to the specified torque. Use the barrel adjuster at the brake lever to remove any remaining cable slack (if there is any). **Important:** After the cable is anchored, check to ensure there is no more than 20 mm (3/4 in) of excess cable beyond the anchor bolt and trim as necessary. After anchoring the cable, slide the lower boot down and place one small dot of light grease inside. Return the boot to its proper position.

Align the Caliper





A. Turn the inboard (closest to the wheel) knob clockwise until it pushes the rotor into the position shown. Note that the rotor should not be centered between the walls of the caliper body. B. Turn the outboard pad adjustment knob in until it is firmly squeezing the rotor against the inboard pad – thus immobilizing the actuating arm. Your caliper is now in perfect position and ready to be tightened. You'll back the pads off again in a few moments. C. Tighten the two CPS bolts that attach the caliper to the mounting bracket. Tighten one and then the other, repeating until they are at the specified torque.

Adjust the Pads

Turn both pad adjustment knobs counterclockwise until desired pad/rotor clearance is achieved (approx. 2 or 3 clicks each). **Important:** only use the barrel adjuster at the brake lever to adjust for cable slack. For lever throw, use the outboard adjustment knob. For brake pad wear adjustment, use both the inboard and outboard knobs.

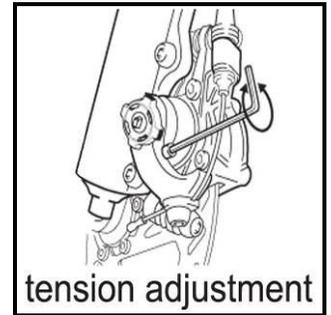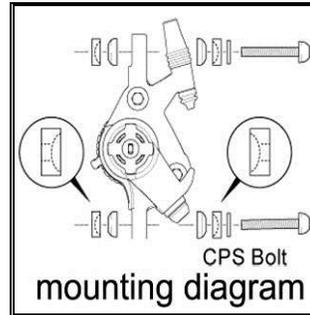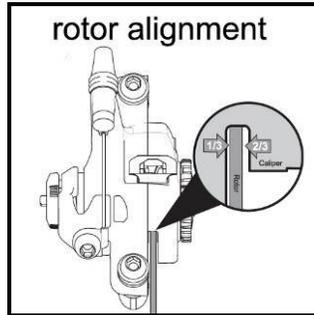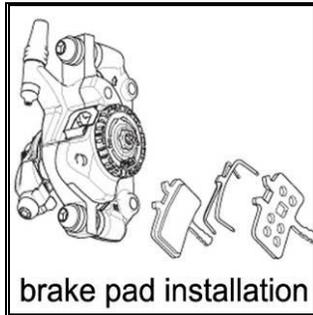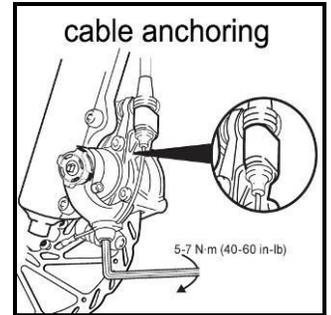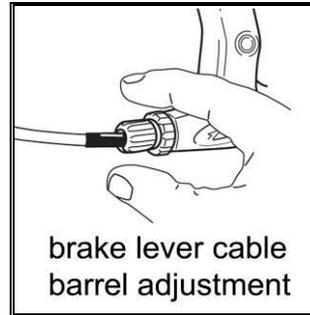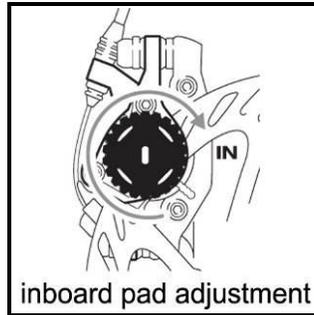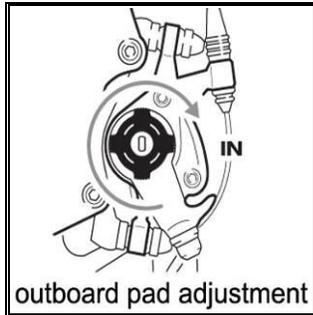

e) Derailleur adjustment (SRAM X7)

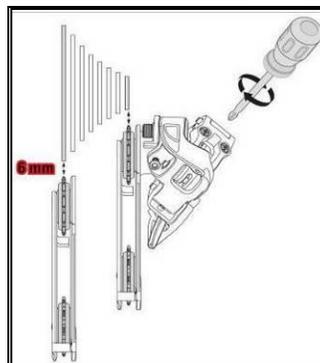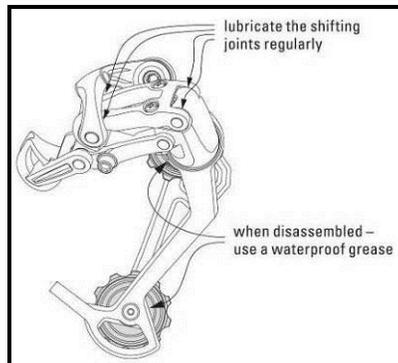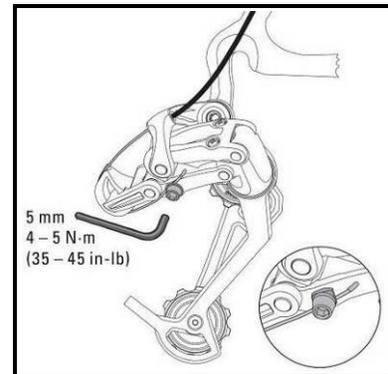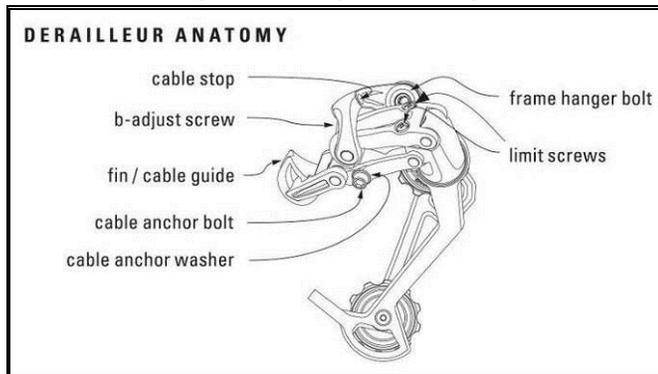

LIMIT SCREWS ADJUSTMENT

- View the rear derailleur and pulleys from behind the rear of the bicycle.
- Turn the limit screw marked 'H' on the outer link of the derailleur to align the upper guide pulley center with the outboard edge of the smallest cog – clockwise moves the guide pulley inboard towards the wheel.
- While turning the crank, push the rear derailleur towards the larger cogs by hand.
- Align the upper guide pulley under the largest cog, center to center, by turning the limit screw marked 'L' on the outer link – clockwise moves the guide pulley outboard away from the spokes.

If the chain of your bicycle falls off at the largest COG/sprocket or the chain is having problems remaining on the correct gear, you may need to adjust your derailleur. There are a multiple ways to adjust your derailleur but for a simple adjustment on the changing of gears, follow these instructions.

Located at the shifter, the adjusting knob where the cable enters the shifter will adjust gear shifting. This knob allows the loosening or tightening of the cable. Rotate this knob clockwise or counterclockwise until the derailleur is properly changing gears. This is a quick fix but for a correct adjustment, the permanent adjustment should be at the derailleur cable locking plate and fixing bolt with the shifter knob used for fine tuning.



Shifting Adjustment Job
Photo is underside of left handlebar assembly.
(red is for illustration purposes only)

SHIFTING ADJUSTMENT

Check that the chain and the rear derailleur are in the smallest cog position.

While pedaling, twist the shifter up one detent.

If the chain hesitates or does not shift to the second cog, increase the cable tension by turning the shifting adjustment knob counter clockwise.

If the chain shifts beyond the second cog, decrease the cable tension by turning the shifting adjustment knob clockwise.

Repeat the two former steps until shifting and cable tension is accurate.

While turning the crank, shift the chain up and down the cassette several times to ensure your derailleur is shifting smoothly.



For a more detailed adjustment of the derailleur, you should bring your bicycle to an authorized Prodeco dealer or a neighborhood bike shop who services SRAM derailleur. There is also a SRAM derailleur guide included with your bike.

Derailleur Troubleshooting

Problem	Cause	Remedy
Chain jumps from smallest sprocket to frame dropout.	High gear limit screw is not adjusted properly.	Turn in "screw H" until the guide pullet is aligned with the smallest sprocket.
Difficult or impossible to shift chain onto smallest sprocket.	High gear limit screw is not adjusted properly.	Unscrew "screw H" until the guide pullet is aligned with the smallest sprocket.
Chain jumps over largest sprocket and falls between the spokes and largest sprockets or inner cage plate scrapes on spokes.	Low gear limit screw is not adjusted properly.	Turn in "screw L" until the guide pullet is aligned with the largest sprocket.
	Rear derailleur or derailleur hanger is bent.	Straighten or replace.
Delayed shifting.	Clearance between guide pulley / sprocket is too large.	Adjust "b-adjust screw" by rotating counterclockwise.
Rough shifting behavior.	Clearance between guide pulley / sprocket is too small.	Adjust "b-adjust screw" by rotating clockwise.
Shifts more gears onto smaller sprockets than intended.	Shift cable insufficiently tensioned.	Turn barrel adjuster on the shifter counterclockwise.
Delayed shifting onto larger sprocket.	Shift cable insufficiently tensioned.	Turn barrel adjuster on the shifter counterclockwise.
Delayed shifting onto smaller sprocket.	Shift cable is too tight.	Turn barrel adjuster on the shifter clockwise.
	Excessive cable friction, pinch or poorly routed cable.	Lubricate or replace cable & housing. Check for excessive bending of cable housing.

f) Wheel check

From time to time you should check the truing of your wheel and the condition of your spokes. Your spokes can become loose over a period of time, especially if your wheel needs truing. The easiest way to check the truing of your wheels is as follows:

- Make sure the battery is turned off and the key is out of the ignition.
- It is best to turn the bicycle upside down and place it on a blanket to avoid scratching the handlebar controls or saddle. When turning the bicycle upside down, rest the bicycle on the handlebar and saddle. If you prefer not turning the bicycle upside down you will need to pick up the wheel off the ground to test.
- Pick up the front of the bicycle by the handlebar and spin the wheel, the wheel should spin straight. If the wheel wobbles from side to side more than 1/8", the wheel should be trued. Truing is required to be performed by a person familiar with truing. Bring your bicycle to your local bicycle shop to true the wheel. To check the rear wheel, pick up the back of the bicycle by the frame and repeat the step above.
- To check for spoke tension, this can be done by squeezing 2 parallel spokes together. The spokes should be tight and you should not be able to bend the spokes. If the spokes bend and feel loose, it is important to bring the bicycle to your local bicycle shop and ask for them to tighten the spokes and true the wheel.

⚠ WARNING: When placing your hands near the wheels of your bicycle, you must confirm the key has been removed from the battery and the battery is removed from the bicycle. If the motor powers while your hands are near the wheels, you could become seriously injured.

g) Lubricating

A common area of maintenance with all bicycles is lubrication. Your Phantom X was designed to be virtually maintenance free but depending on the amount of riding and the environment, your bicycle should be lubricated from time to time. Areas not requiring lubrication are the HUBs, Bottom Brackets and Headset. They have bearing systems which do not require lubrication and any maintenance on these areas should be performed by a service agent. Lubricating is always at the point where 2 surfaces touch together and friction is created. Your local neighborhood bicycle shop or most mass merchants who sell bicycles will offer various types of lubes for your bicycle. Below are the areas you should lubricate according to your maintenance schedule at the end of this chapter.

- **Chain:** The chain should be lubricated at each of the links. You can turn the crank counter clockwise while lubricating each area of pivot.
- **Forks:** Your forks are suspension forks and you should use a lubricant which does not dissolve rubber seals. Place a few drops where the fork stanchions (top legs) enter the seals of the lower legs.
- **Brakes:** Where the brake arms pivot will require a drop of lubricant. Do not put lubricant on the brake rotors or pads. The brake levers pivot pins require a drop of lube at the top of the pin.
- **Brake cables:** Your brake cables are stainless steel and in lined housings. They normally will not require lube but if under harsh conditions and the brake cables feel tight, you can add a drop of lubricant at the exit and entrance of each cable from and to the brake housings.
- **Folding Mechanisms:** The folding hinge components on the frame and handlebar stem should each be lubricated with a drop of lubricant.

Any other type of lubrication or greasing of bearings should be performed by an authorized Prodeco Technologies dealer.

h) Crankset

The crankset of your Phantom X is a multi-piece system which includes a bottom bracket, crank arms, chainring, chainring bolts, chain guard and chain. All items are designed as maintenance free components except for lubricating the chain from time to time. The bottom bracket is a sealed bearing system with no serviceable parts. Each component of the crankset has an industry standard measurement and is available through your dealer or through Prodeco Technologies directly. Traditional bicycle components will also fit into these measurements. Please refer to the Chapter 12 Parts and Components list for replacement part numbers and the part measurements.

i) Pedals

The Phantom X has folding pedals to allow for a smaller size space when folded. Each pedal has 2 tabs on the outside edges of the pedal's nylon cage. To fold the pedals, squeeze the tabs and pull the pedal outwards with a slight force. Once the pedal nylon cage slides out 1/2" from the aluminum body, you can fold the pedal down. To straighten the pedal for riding, lift the pedal nylon cage and slide the pedal back into the aluminum body. A slight force may be required to push the pedal in and for the tabs to lock the pedal in place. The pedals with the Phantom X have a double bearing system. These bearings will need to be greased from time to time, it is best you bring the pedals to your local bicycle shop to grease the pedal bearings.

j) Headset

Cartridge bearing headsets only are utilized on all Prodeco Technologies bicycles. These are maintenance free systems and should not be serviced by anyone other than a knowledgeable bicycle repair shop. The headset on your bicycle is a double nut threaded system with an alloy cover. The headset is what holds the fork tight to the frame of your bicycle. There is a small chance these nuts could become loose over time. If you notice the handlebar is loose to the fork, bring your bicycle to a local bicycle shop so they can tighten the headset.

k) Maintenance schedule: As a common practice you should follow your maintenance schedule. You should study it and allow it to become second nature to your riding.

Maintenance Schedule	Each Ride	Weeklv	Monthlv	6 Months	Yearlv
Tire Pressure	X				
Tire Condition	X				
Visual Inspection	X				
Brake Lever Pressure	X				
Quick Releases	X				
Handlebar Alignment	X				
Saddle Alignment	X				
Battery Pack Locked	X				
Wheel Check	X				
Inspect Frame Condition (include welds for fissures)		X			
Clean and Lubricate Chain		X			
Check Brake Pads		X			
Lubricate Forks			X		
Lubricate Brakes & Cables			X		
Lubricate Folding Mechanism			X		
Check All Bolts and Torque Settings			X		
Clean Bicycle			X		
Charge Battery			X		
Check Wheel Spokes			X		
Inspect Rim Condition			X		
Inspect Saddle, Rails and Clamp			X		
Grease Pedal Bearings				X	
Check HUB Bearings				X	
Check Headset Bearings				X	
Check Bottom Bracket Bearings				X	
Replace Brake Pads					X
Replace Brake Cables (depends on use)					X
Replace Tires (depends on use)					X

- l) Torque specifications for common parts:** Nuts and bolts for your bicycle are set to a torque setting at the factory. Over time, use and even shipping could cause nuts and bolts to become loose. Below is a chart on the torque settings in Lb per Inch for the common parts of the Phantom X. They have also been converted to Lb per Foot and NM.

Torque Item	lb per In	lb per Ft	N M
Axle nut (front motor)	250 lb*in	20.8 lb*ft	28.25
Bottom bracket	420 lb*in	35 lb*ft	47.46
Brake lever clamps (at handlebar)	70 lb*in	5.8 lb*ft	7.91
Cassette/Freewheel	300 lb*in	25 lb*ft	33.9
Chainring bolts	80 lb*in	6.7 lb*ft	9.04
Crank bolt	350 lb*in	29.2 lb*ft	39.54
Crank bolt cap (if applicable)	100 lb*in	8.3 lb*ft	11.3
Derailleur bolt	80 lb*in	6.7 lb*ft	9.04
Disc brake caliper bolts (at frame)	80 lb*in	6.7 lb*ft	9.04
Disc rotor bolts	55 lb*in	4.6 lb*ft	6.21
Disc Brake Cable Arms (pinch bolt)	55 lb*in	4.6 lb*ft	6.21
Headset locknut	150 lb*in	12.5 lb*ft	16.95
Kickstand bolt	100 lb*in	8.3 lb*ft	11.3
Pedals	300 lb*in	25 lb*ft	33.9
Saddle rail clamp bolts (M6)	140 lb*in	11.7 lb*ft	15.82
Shifter (at handlebar)	20 lb*in	1.7 lb*ft	2.26
Stem adjustable bolts	150 lb*in	12.5 lb*ft	16.95
Stem clamp binder bolts (4 bolts)	60 lb*in	5 lb*ft	6.78
Stem quill bolt	250 lb*in	20.8 lb*ft	28.25
Throttle	25 lb*in	2.1 lb*ft	2.825
V brake bolts (at frame)	80 lb*in	6.7 lb*ft	9.04
Quick Release (at half way tighten the lever with resistance)			

Chapter 8: Battery Management



This section describes your battery and similar to Chapter 3, section o. "Charging your battery" but goes into further detail.

a) About your battery

The Li-ion battery system of the Phantom X is the latest technology with a LiFePO4 chemistry. This battery is maintenance free with no serviceable parts. You must never open the battery as this will void the warranty. Each battery has a specific serial number and barcode which can be found on the underside of the battery. Please read the warning labels on your battery.

b) Removing the battery

The Phantom X battery removes easily for charging or storing. The battery base utilizes an ignition key to lock the battery in place and to avoid theft. The battery will not power the bicycle unless locked in place. There are 3 points on the ignition for the key. There is the "UNLOCK" position which allows the battery to be removed and the key can slide in and out. There is the "OFF" position which locks the battery in place, the key can be slid out but the bicycle is not powered. The last position is the "ON" position. The bicycle is now powered ON, the battery is locked and the key is in and cannot slide out.

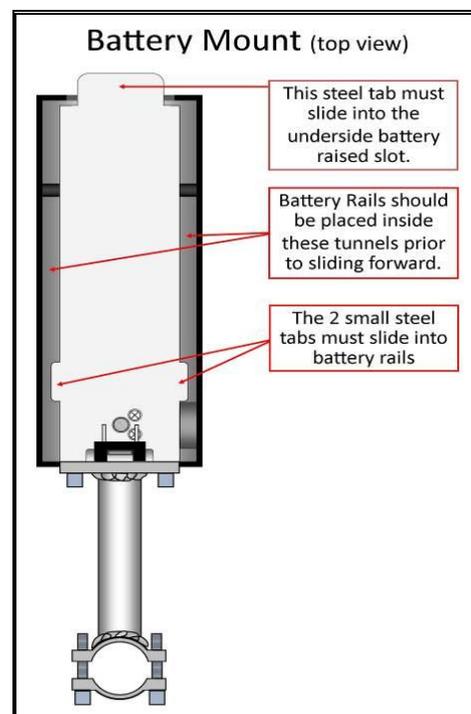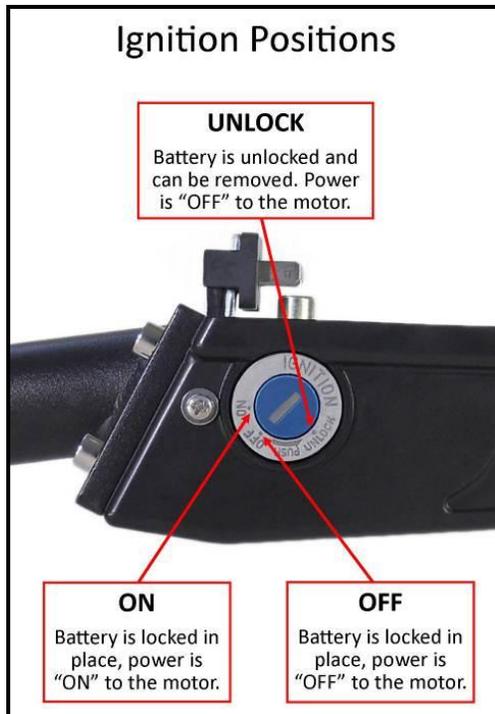


Underside of Battery



The battery rails must be placed in the battery mount tunnels behind the small metal tabs. The metal tabs will lock battery in place when battery is slid forward.

The battery mount's large metal tab slides into the underside raised slot when sliding the battery forward.

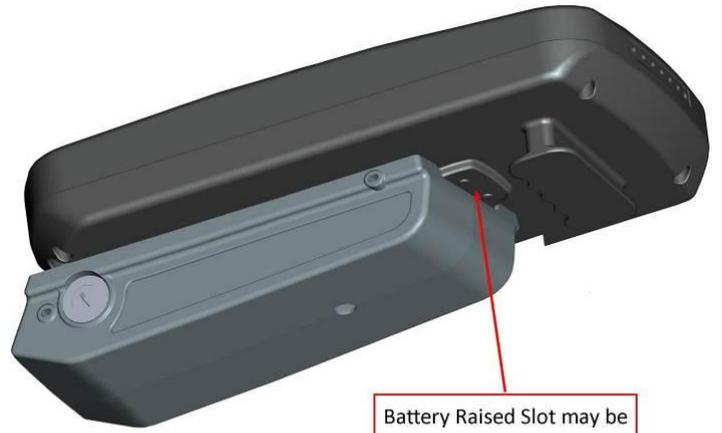

Battery Raised Slot may be tight. The mount metal tab must enter this slot to hold the battery in place.

The battery should be placed flat on the mount behind the small metal tabs. The battery is then slid forward to lock in place.



Sliding the Battery and Locking

The battery is now locked in place



c) Installing and locking the battery

- As shown in the photos above, the battery has 2 thin “slotted rails” (1 on each side of the battery towards the front) and a “raised slot” (towards the rear and near the handle) at the underside of the battery. These rails and slots hold the battery in place when riding.
- The battery mount attached to the bicycle has one large metal tab at the rear and 2 small metal tabs at each side.
- When laying the battery onto the mount, place the battery so the rear “raised slot” near the battery handle is behind the large metal tab on the mount. The 2 “slotted rails” on the underside of the battery should be behind the 2 small metal tabs on the mount. The battery will now be resting flat on the mount.
- Firmly slide the battery forward allowing the ends of the underside rails to fasten over the 2 small tabs (2 small tabs lock into the “slotted rails”). The mount’s large metal tab at the rear must also enter the “raised slot” of the battery underside. The metal tabs will firmly hold the battery in place.
- You may have to use some force when installing the battery for the first time. Once installed for the first time, it is not as difficult to install afterwards.
- Upon the battery being fully slid into place, the key will then lock the battery in place and the LED lights of the throttle will light once the key is turned into the “ON” position. If the key has difficulty locking the battery, attempt to slide the battery in place again, following the instructions above.

To remove the battery, follow these instructions:


- Locate the key ignition on the battery base and turn the key in a counter clockwise rotation to the “UNLOCK” position. You must push the key in to turn from the “OFF” position to the “UNLOCK” position.
- Grab the handle at the back of battery and pull towards the back of the bicycle to slide it off.
- The battery is now transportable and can be charged away from the bicycle.

d) Charging the battery

The battery can be charged on or off the bicycle. If charging the battery on the bicycle, the key should be in the “OFF” position.

To charge the battery, follow these instructions:

- Remove the rubber cover off the battery’s RCA charging input.
- Insert the charging plug from the charger into the battery’s RCA charging input.
- Insert the charger’s power cord into a wall outlet.
- The charger’s LED light will light RED while the charger is charging the battery.
- The charger’s LED light will light GREEN upon the battery being fully charged.
- The top of the battery includes a battery indicator to also check for a full charge. Press the indicator button to display the battery’s energy storage.
- Once the battery is charged, you should discontinue charging and remove the charger.
- Unplug the charger’s power cord from the wall and remove the charging plug from the battery.
- Lastly, cover the RCA charging input with the attached rubber cover and you are ready to install the battery pack back onto your bicycle.

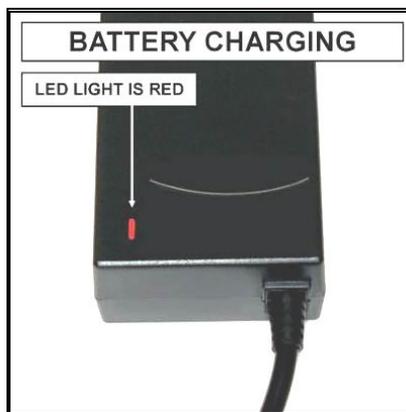


e) Storing the battery

The Li-ion battery the Phantom X utilizes is the safest and latest technology in Li-ion battery cells. It is recommended that you do not store the battery in extremely hot conditions. If the bicycle is being stored indoors in a cool environment, the battery should be stored on the bicycle in the “OFF” position. The battery should be kept away from fires or sparks and also away from possible water damage.

f) Battery power indicator

The Phantom X has a 3 LED light indicator on the handlebar throttle displaying the battery power available. There is also a 3 LED light display battery indicator on the battery itself. The LED indicator on the throttle is explained in Chapter 9: Electrical Components, section d. “Throttle”. The indicator on the battery is explained below. The battery indicator has 3 LEDs displaying 3 levels of power. When pressing the indicator button, the lights will light according to power storage. When pressing the button, if the 3 LEDs light up, the battery is at over 50% power to full. If only 2 LEDs light up, the battery is at 50% power or possibly less and should be charged. If only 1 LED lights up, the battery is near depletion and should be recharged immediately.

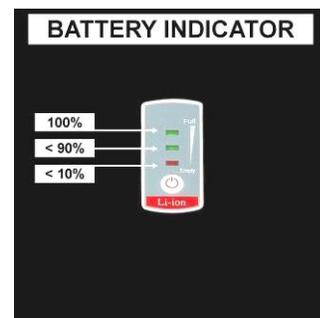

g) Battery replacement

If your battery is no longer working properly and needs replacing, you can contact your local authorized dealer for a replacement or contact Prodeco Technologies directly. Contact service@prodecotech.com or call 800-943-6190 to discuss the issue and determine if it is the battery. It is very rare for a LiFEPO4 battery to have issues in the first 2 years and there may be another situation with the bicycle rather than the battery, if the bicycle is not powering properly. The battery is covered under warranty for the first 2 years of use. After 2 years, a replacement battery can be purchased by contacting your dealer or Prodeco Technologies. The battery part number and price can be found in Chapter 12.

h) Battery disposal

The LiFEPO4 battery that comes with your Phantom X is a non-hazardous battery. We do however suggest recycling the battery and disposing of it by the following means:

- Return the battery to your local authorized Prodeco Technologies dealer.
- Return the battery directly to Prodeco Technologies.
- Dispose of the battery at your local city recycling facility.

Chapter 9: Electrical Components

The Phantom X electric components were developed to be maintenance free with no serviceable parts. There are 5 components used to power your bicycle. Each component can easily be replaced by the average person with minimal mechanical skills. The design has been simplified so your local bicycle shop can service it without issue and minimal time. Please review the sections below on the electrical components used on your Prodeco bicycle and how to replace a component for a new one. Each electrical component is listed, except for the battery which was detailed in Chapter 8. Each individual component part number can be found in Chapter 12.

a) HUB motor

The HUB motor utilized on your Phantom X is one of the most advanced e-bike HUB motors developed today. It is a high efficiency, high torque brushless geared motor with a free spinning drive system. The motor will spin freely, the same as a traditional bike hub, only engaging when the throttle is applied. You will be able to pedal your bike the same as a traditional non-electric bike if choosing not to throttle and engage the motor.

The gear system in your Prodeco Technologies motor is 20% stronger than the typical other geared hub motors in the industry. The motor offers a nominal 300W of power at 36 Volts and a peak of 504W. The power is sufficient to move the bicycle and rider on flat surfaces at speeds up to twice what a typical rider pedals. Steep inclines will require pedaling by the rider to power over the incline. It is highly suggested the rider pedals along with the motor to enhance traveling distance even on flat surfaces. The motor is powered through a "Hall Effect Sensor" approach. A "Hall Effect Sensor" motor is powered in 3 stator phases. As power is phased, the motor advances forward. The axle of the motor is the spindle of the stator. The stator remains fixed while an internal Neodymium magnet hub floats over the stator and gears the exterior hub forward.

A weatherproof connector at the motor connects the wiring harness to the motor. This connector is an 8 pin brass connector and designed to withstand the elements. If the motor needs to be replaced, the connector simply has to be unplugged for the motor to be removed as explained in Chapter 6, section b. When installing the motor, it is very important the connector is plugged properly or the motor will not power. There are 2 arrows, one on each end of the connector which must align. There is an additional line on the inside connector which must meet the edge of the outside connector when inserting for the motor to have a solid connection. The motor is covered under warranty as a complete wheel including spokes and rim to the consumer. If the motor fails, contact Prodeco Technologies or the closest Authorized service center for a replacement. Simply remove the motor as explained in Chapter 6. The motor can also be purchased separately. Refer to Chapter 12 for the part number and price.

b) Brushless hall sensor controller


The motor on the Phantom X requires a specific controller to properly produce the right "Hall Sensor Effect" as described in the previous section regarding the motor. The controller that comes with your bicycle has been designed to be easily changed if an issue was to occur. The controller is considered the brains of the bicycle and is located in the battery base which is attached to the bicycle. The battery base is the box where the key inserts for the ignition. The bolts holding the cover to the base can easily be removed within a few minutes. Once the cover is off of the battery base, the controller can be disconnected. If removing the controller, you must first remove the battery completely from the bicycle. There is only one way to connect and disconnect the controller from the bicycle. No two connections are the same.

c) Wiring harness

Your bicycle uses a separate wiring harness for the motor to plug to the controller. This allows for easy replacement.

d) Throttle (SEE PHOTO)

The variable throttle included with all Prodeco bicycles has an On/Off button. The red button below the battery indicator on the throttle engages the power to the motor. The twist throttle was designed to allow you the ability to choose the riding speed and determine the amount of torque off the line. Similar to an automobile, the throttle mimics the depressing of the accelerator. The higher the speed, the less distance per charge (less distance per gas tank), the faster you accelerate off the line, the less distance per charge. If there are multiple stop and starts, this will also affect the range of distance per charge. It is recommended you become accustomed to your riding style and adjust the style depending on distance needed per charge. For example: if you are planning a short local trip, full throttle at takeoff and top speed will not be an issue due to your ability to be able to recharge the battery prior to the next trip. If you are planning a longer trip, 30-40 miles or more, it is suggested you add pedaling, hold throttle back 10% and whenever possible allow the bicycle to coast under no power. Coasting under no power is similar to riding a traditional pedal powered bicycle. When riding, a rider will pedal for a few seconds and then stop pedaling, allowing the bike to coast with no power being used. This will greatly enhance your distance between charging.

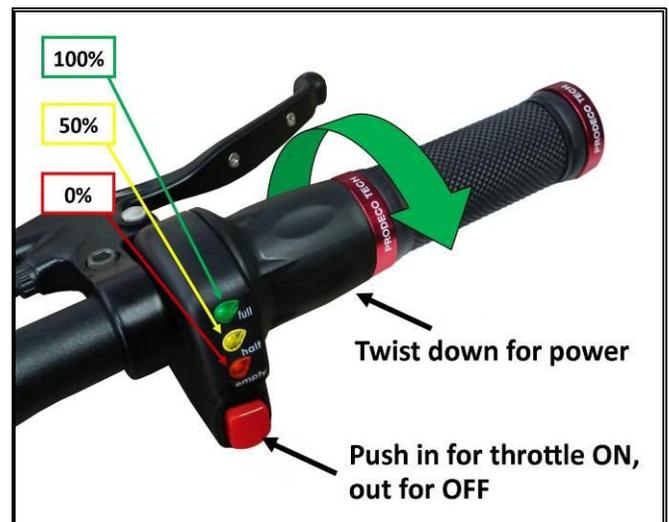


The throttle incorporates an LED battery indicator to assist the rider with determining the amount of charge left in the battery. You should also understand the LED indicators react according to load. There is 1 Green LED, 1 Yellow and 1 Red LED. If the Green LED no longer lights while the bike is not being powered, it is time to recharge the battery. The Green LED does not always represent a fully charged battery though. For example, the Green LED may be lit until a steep incline. As you ride up the incline, you may notice the Green LED will dim as the motor increases the pulling of Amps from the battery. Depending on the load being placed on the motor and/or grades of incline, the green LED dimming represents the accurate battery capacity. Upon the Green LED no longer being lit during riding, particularly under no load, the battery should be charged prior to the next ride. If the Green LED is dimming under light loads, the battery could be under 50% capacity and should be charged. After multiple rides and charges, you will become familiar with the distance per charge available based on your riding style and terrain. For rides close to home with nominal pedaling needed, you should attempt to fully discharge your battery to enhance your understanding on distances per charge.

Chapter 10: Warranty Service and Repair

Prodeco Technologies has taken great measures in designing and producing your new bicycle to be issue free while offering years of performance. The bicycle however is a mechanical item and an issue can arise. Your bike components are covered for a 2 year period from the date of purchase or within 30 months of the production date, whichever is sooner. The production date is part of your master serial number. Your master serial number can be found on the production label located on the box your bike arrived in or request this number from your dealer. The breakdown of the master serial number is as follows:

Production Date Master Serial Number Explained

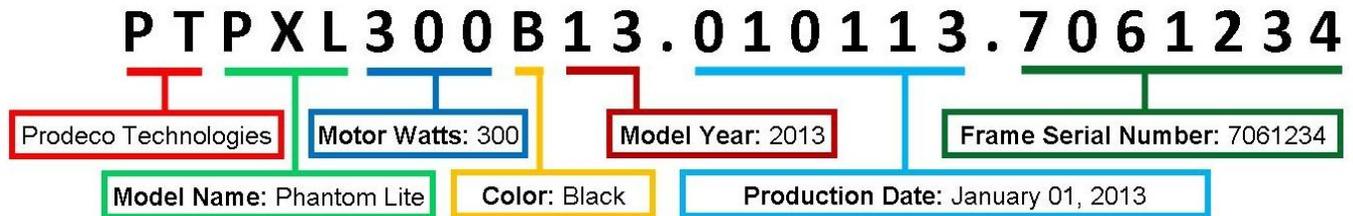

a) 2 Year limited warranty

010913-B



Lithium Ion Electric Bicycle

2 YEAR LIMITED WARRANTY

PRODECO TECHNOLOGIES warrants this product, including all individual components against defects in material or workmanship as follows:

PRODECO TECHNOLOGIES LIFETIME FRAME WARRANTY

Prodeco bicycle frames are warranted to be free from manufacture defects in materials and/or workmanship for lifetime of the original owner. If the bicycle is sold and/or ownership transferred, the frame warranty will follow Prodeco Technologies' 2 year component warranty.

PRODECO TECHNOLOGIES LIMITED 2 YEAR COMPONENTS WARRANTY

Prodeco Technologies' bicycle components including forks, stem, handlebar, headset, seat post, saddle, brakes, cables, bottom bracket, crank set, pedals, chain, rims, spokes, wheel hub, freewheel, cassette, derailleur, shifter, motor, throttle, controller, wiring harness, kickstand, reflectors and hardware are warranted to be free from manufacture defects in materials and/or workmanship for a 2 year period from the date of original purchase. Electronic components such as controllers, batteries, motors, and chargers may need to be returned to Prodeco Technologies for testing prior to replacement.

PRODECO TECHNOLOGIES LIMITED 2 YEAR BATTERY WARRANTY

Prodeco Technologies' lithium ion LiFEPO4 batteries are warranted to be free from manufacture defects in materials and/or workmanship for a 2 year period from the date of original purchase. The battery warranty does not include damage from power surges, use of improper charger, improper maintenance or other such misuse, or normal wear.

PRODECO TECHNOLOGIES LIMITED 30 DAY FULL REPLACEMENT WARRANTY

If within the first 30 days of purchase, Prodeco Technologies at their sole option and expense will repair or replace any defective Prodeco bicycle upon determining whether the damage, failure, or loss is due to a major defect. Prodeco Technologies or your Prodeco dealer will have sole discretion to determine whether the damage, failure or loss is due to a major defect or otherwise. Warranty claims must be made by the original purchaser by contacting Prodeco Technologies Customer Service Center at 800-943-6190 within the 30 day warranty period. After the initial 30 day period, the registered owner is responsible for shipping costs to Prodeco Technologies of the warranty parts for replacement or repair.

TERMS OF WARRANTY

This warranty only applies to the original registered owner of a Prodeco Technologies bicycle. This warranty does not apply to rental or commercial use bicycles. This warranty is expressly limited to the replacement of defective parts with those of equal or greater value at the sole discretion of Prodeco Technologies. This warranty does not cover any damage or defects resulting from failure to follow instructions in the owner's manual, acts of God, accident, misuse, neglect, abuse, commercial use, alterations, modification, improper assembly, operator error, water damage, stunt riding or improper follow-up maintenance. This warranty does not include normal wear and tear parts (tires, tubes, brake pads). Prodeco Technologies will not be liable and/or responsible for any damage, failure or loss caused by any unauthorized service or use of unauthorized parts. In no event shall Prodeco Technologies be responsible for any direct, indirect or consequential damages, including without limitation, damages for personal injury, property damage, or economic losses, whether based on contract, warranty, negligence, or product liability in connection with their products.

WARRANTY REMEDY

If your Prodeco Technologies electric bicycle is not working properly because of a defect, you may return it to the place of purchase or any authorized Prodeco Technologies dealer for inspection. You may direct your warranty questions to an authorized Prodeco dealer or Prodeco Technologies Customer Service at 800-943-6190. Parts which are verified by Prodeco Technologies to be defective and qualify for warranty replacement will be provided after your warranty claim is processed. Return of the warranted defective part to Prodeco Technologies is the responsibility of the owner. Prior to any warranty replacement, your bicycle must be registered with Prodeco Technologies on our website <http://prodecotech.com/register-your-bike/> or by mailing in the warranty registration card. Proof of purchase in the form of a bill of sale or receipted invoice is required.

This warranty is the sole and exclusive remedy and is in lieu of all other remedies, including consequential and incidental damages. Some states do not allow the exclusion of limitation of consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights that may vary from state to state.

SHIPPING TERMS


International customers and customers outside of the Continental USA will be subject to all shipping fees, duties and taxes, regardless of location of initial purchase. After 30 days of ownership, shipping charges are the responsibility of all bicycle owners regardless of location for shipping components to Prodeco Technologies or an authorized Prodeco Technologies dealer.

b) Registering your bike

It is very important you register your new bicycle when purchasing. This is the only way your warranty will take effect. It is required you register your bicycle within 2 weeks from the date of purchase. You must save your receipt of purchase. To register your bicycle, you can fill out the form on the Prodeco Technologies website at www.prodecotech.com or you can fill out the registration card in the next section below and either scan it to service@prodecotech.com, fax it to 954.974.6729 or mail it to: **Prodeco Technologies, 1201 NE 38th Street, Oakland Park, FL 33334**

c) Serial numbers and where to find them

The motor has the serial number written alongside the outside shell. The frame serial number is located under or on top of the crank of the frame. The serial number for the battery is at the back underside right corner.

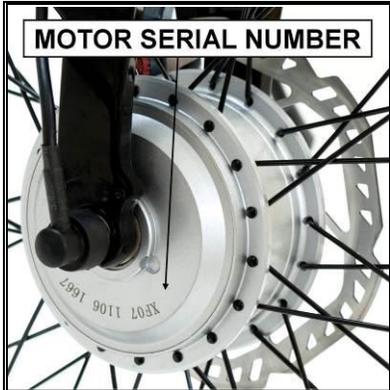

d) Registration Card

Prodeco Technologies Registration & Warranty Support Form

First Name, Last Name _____

Address: _____

Suite or Apartment Number: _____ (if applicable)

City, State, Zip (Postal) Code: _____

Country: _____

Email: _____

Phone: _____

Model Purchased: _____

Date Purchased: _____

Dealer Purchased From: _____

Dealer Location: _____

Dealer Phone: _____

Dealer Website: _____ (if applicable)

Dealer Satisfaction: 1 2 3 4 5 6 7 8 9 10 (10 is excellent)

Sales Person Knowledge: 1 2 3 4 5 6 7 8 9 10 (10 is excellent)

Would You Recommend Dealer: 1 2 3 4 5 6 7 8 9 10 (10 is excellent)

Purchase Satisfaction: 1 2 3 4 5 6 7 8 9 10 (10 is excellent)

Master Serial Number: _____ (main box label)

Frame Serial Number: _____ (crank bottom bracket)

Motor Serial Number: _____ (motor side)

Battery Serial Number: _____ (underside of battery)

Spare Battery Serial Number: _____ (if applicable)

Primary Use: _____

Expected Travel per Month: _____ (miles)

e) Part replacement procedure

In the occurrence of a component becoming defective, Prodeco Technologies tries to make part replacement as painless as possible. Simply contact Prodeco Technologies service department and explain the problem. A representative will assist you with getting the part at issue replaced quickly. You can also bring your bicycle to a local authorized dealer and they can assist you with any problem. Parts are always in stock and can be ship immediately. Please refer to Chapter 12: Parts for a list of the parts incorporated into your bicycle.

f) Contacting Prodeco Technologies

You can contact us via the website, email, phone, fax or by mail. Please review the contact details below:

Website: www.prodecotech.com

Email: service@prodecotech.com

Phone: 800.943.6190

Fax: 954.974.6729

Mail: Prodeco Technologies, 1201 NE 38th Street, Oakland Park, FL 33334

Chapter 11: Specifications

Specifications	
Frame:	Folding Aircraft Grade T6 Aluminum Alloy
Folding Lock:	Patented 2 Stage Overlapped Locking EZ Adjust
Finish:	Satin Black w/ Clear Coat Protection
Fork:	ZXR Magnesium Alloy w/ Pre-Load Adjust
Motor:	Prodeco 300W HO Brushless Geared w/ Disc Mount
Battery:	Prodeco LiFePO4 38.4V 6Ah Removable v1.3b
Power:	Twist Throttle Control
Headset:	CH Cartridge Bearing w/ Sealed Alloy Top
Stem:	Promax 31.8mm Adjustable Aluminum Alloy
Handlebar:	Promax Straight Aluminum 31.8 x 580L
Front Brake:	Avid BB7 Disc Brake w/ 200mm SS Rotor
Rear Brake:	Avid BB7 Disc Brake w/ 200mm SS Rotor
Brake Levers:	Avid Speed Dial 7
Cables:	Stainless Steel in Lined Braided Housing
Crankset:	Forged Aluminum 170 Arms w/ 44 x 3/32" CR
Chain Guard:	Aluminum Alloy Sandblasted
Bottom Bracket:	PT 110mm Sealed Bearing 68mm English
Pedals:	Aluminum Alloy & Nylon Folding w/ Cr-mo Axles
Chain:	SRAM PC 971 Narrow
Rear HUB:	WR 135mm 8 Speed Free Hub w/ Quick Release Axle
Rear COG:	SRAM PG 970 11-32T 9 Speed Cassette
Rear Derailleur:	SRAM X7 9 Speed
Shifter:	SRAM XO Twist Grip 9 Speed
Rims:	Stars 12G x 36H Triple Box Aluminum
Spokes:	18-8 Stainless Steel 12G & Solid Brass Nipples
Tires:	Continental Traffic Tire 26" x 2.1"
Tubes:	Kenda 26" X 2.125" 32mm Valve
Kick Stand:	Center Mount All Aluminum Double Leg
Seat Post:	Promax Aluminum 27.2" x 350MM
Seat Post Bracket:	Promax Double Barrel Bolt Infinite Adjust
Saddle:	VL-3205 - Phantom Sport Saddle VELO PLUSH
Reflectors:	Cateye White Front & Wheels w/ Red Rear
Speed:	18 MPH
Range:	18 - 25 Miles
Charging Cycles:	2000 +
Charging Time:	3 Hours
Weight Limit:	220 LBS
Frame Warranty:	Lifetime
Components Warranty:	2 Years
Weight:	46 LBS

Chapter 12: Parts

#	Part Description	Part Number	Price
1	ACCESSORY - BELL - Aluminum - v31 - Thumb Lever - 40mm Diameter - Black Shell	AC.BE.TH.40.B	\$3.95
2	ACCESSORY - TOOL - Multi Use Tool - 18018 - Anodized Red & Nickel	AC.TO.MU.18.RN	\$16.95
3	ACCESSORY - TOOL - Y Tri Hex - 18021 - 4mm, 5mm & 6mm - Black	AC.TO.Y.21.B	\$2.95
4	BATTERY - Prodeco Technologies - LiFePO4 - 38.4V - -- 6Ah -- - v1.3a	PT.BA.LIFE.36V.6A.13A	\$299.95
5	BATTERY CHARGER - 43.8V 2Ah - LiFePO4 - (for 36V Battery)	PT.BC.36V.2A.13A	\$39.95
6	BATTERY MOUNT - Prodeco Technologies - Aluminum & Steel - 34.9mm Full Mount	PT.BAM.AS.349.MS.13A	\$29.95
7	BATTERY MOUNT PART - Prodeco Technologies - Aluminum - Mount Stem Only	PT.BAM.PT.349.ST.13A	\$9.95
8	BATTERY MOUNT PART - Prodeco Technologies - Mount Cover - Left	PT.BAM.PT.COV.ML.13A	\$4.95
9	BATTERY MOUNT PART - Prodeco Technologies - Mount Cover - Right	PT.BAM.PT.COV.MR.13A	\$4.95
10	BATTERY MOUNT PART - Prodeco Technologies - STRUT - 295mm	PT.BAM.PT.STR.295.13A	\$12.95
11	BOTTOM BRACKET - Sealed Bearings - Square Taper - 110.5mm x 68mm	PT.BB.SB.SQ.110.68	\$14.95
12	BRAKE DISC - Avid BB7 - CALIPER SET - Graphite - 180 POST Front	PT.BR.AV.BB7.20P.G	\$79.00
13	BRAKE DISC - Avid BB7 - CALIPER SET - Graphite - 180 IS Rear	PT.BR.AV.BB7.40IS.G	\$79.00
14	BRAKE DISC - PART ONLY - Avid BB7 - Pad Set	PT.BR.PT.AV.BB7.PR	\$19.95
15	BRAKE LEVER - Aluminum - AVID - Speed Dial 7 - LEFT SIDE - Graphite	PT.BL.AV.SD7.GRLS	\$14.00
16	BRAKE LEVER - Aluminum - AVID - Speed Dial 7 - RIGHT SIDE - Graphite	PT.BL.AV.SD7.GRRS	\$14.00
17	BRAKE ROTOR - Avid - HSX - Heat Shedding - 6 Bolt Pattern-Stainless Steel - 180mm	PT.BR.RO.AV.HSX.180	\$78.00
18	CABLE HOUSING - Brake - Promax - Braided Alloy Carbon - w/ Ferrules - Front - 900mm	PT.CAH.BR.PX.BR.900	\$8.95
19	CABLE HOUSING - Brake - Promax - Braided Alloy Carbon - w/ Ferrules - Rear - 1400mm	PT.CAH.BR.PX.BR.1400	\$11.95
20	CABLE HOUSING - Derailleur - Promax - Braided Alloy Carbon - to Size - 1400mm	PT.CAH.DE.PX.BR.1400	\$13.30
21	CABLE INNER - Brake - Promax - Standard - Stainless Steel - 1700mm	PT.CAIBR.PX.SS.1700	\$2.95
22	CASSETTE - 9 Speed - SRAM - PG 970 - 11-32T - Satin Chrome	PT.CS.SR.PG970.1132	\$71.00
23	CHAIN - SRAM - PC 971 - 9 Speed - Nickel & Grey - 118L	PT.CH.SR.PC971.118	\$26.00
24	CHAIN PART - SRAM - Connector - Power Link 9 Speed - Gold	PT.CH.SR.CO.PL9.G	\$3.00
25	CRANKSET - PART ONLY - Chain Guard ONLY - for 44T - Black	PT.CR.PT.CG.44.B	\$14.95
26	CRANKSET - PART ONLY - Chain Ring Bolts - Double Male & Female - (4 pc set)	PT.CR.PT..CRB.DS	\$1.95
27	CRANKSET - PART ONLY - Chain Ring ONLY - 44T - Black	PT.CR.PT.CR.44.B	\$8.95
28	CRANKSET - PART ONLY - Crank Arm ONLY - for 44T - Left Side - Black	PT.CR.PT.CA.44LB	\$9.95
29	CRANKSET - PART ONLY - Crank Arm ONLY - for 44T - Right Side - Black	PT.CR.PT.CA.44RB	\$12.95
30	CRANKSET - PART ONLY - Crank Bolts Only - Hex 2 Piece Set - for Square Taper BB	PT.CR.PT.CB.	\$2.95
31	DERAILLEUR - SRAM - X7 - Medium Cage - 9 Speed - Storm Grey	PT.DE.SR.X7.M89.G	\$65.00
32	FORK - Suspension - HL ZXR - Magnesium - 1 1/8" Threaded 130HT - Black Matte	PT.FO.ZXR.130T26.BM	\$99.95
33	FRAME - Phantom X - V13A - Aluminum - Folding - Black Matte	PT.FR.PHX2.V13A.BM	\$149.95
34	GRIP SET - Prodeco - 27024 - Black Kraton - 90mm Left / 90mm Right - RED Lock Rings	PT.GR.PR.KR.9090.RE	\$12.95
35	HANDLEBAR - Aluminum - HL - 198 - Straight x 31.8 x 600 x 10° - Black	PT.HA.HL.118.600.B	\$14.95
36	HEADSET - Threaded - Integrated 44mm - Aluminum - Cartridge Bearings - Black	PT.HE.CH919.THCB.B	\$19.95
37	HUB - REAR - WR 92 - 9 Speed 36 x 12G - Quick Release DISC 135mm - Black	PT.HU.RR.WR92.8D.B	\$29.95
38	KICK STAND - Aluminum - K519 - Adjustable - Double Leg for 26" Bikes (3° increase)	PT.KS.519.AD.DL.B	\$34.95
39	MOTOR - FRONT 26" - Prodeco 36V - 300W - Geared Free Spinning - Black	PT.MO.FR.26.PR36.300.B	\$169.95
40	MOTOR CONTROLLER - Prodeco Technologies - Brushless HALL - 36V - 14A	PT.MC.BH.36.14.13A	\$39.95
41	MOTOR WIRE - Harness - 1260mm - Medium Front - v1.3a	PT.MWH.1260.MED.F.13A	\$20.95
42	PEDALS - HTI - Folding F2 - Aluminum & Nylon	PT.PE.HTI.F2.	\$14.95
43	REFLECTOR - Cateye - NGS-272 - Seatpost Bracket - Black	PT.RE.CE.GS272.SPB	\$0.95
44	REFLECTOR - Cateye - NGS-318 - Handlebar Bracket - Black	PT.RE.CE.GS318.HBB	\$0.95
45	REFLECTOR - Cateye - RR-165-BSLW - Front Round Reflector - 165mm - White	PT.RE.CE.165.FR.W	\$1.95
46	REFLECTOR - Cateye - RR-165-BSLW - Rear Round Reflector - 165mm - Red	PT.RE.CE.165.RRR	\$1.95
47	REFLECTOR - Cateye - RR-530 - Wheel Reflector Set - White	PT.RE.CE.530.WHW	\$2.95
48	RIM TAPE - Kenda - 26" - 25mm Wide - Poly Strips	PT.RI.KE.26.25.P	\$2.95
49	RIM-Aluminum - Stars - 26" - J25C - Triple Wall, 36 Holes x 12G - All Black	PT.RI.ST.26.J25.BB	\$32.95
50	SADDLE - VELO PLUSH 3205 - Sport Vented - 268mm x 173mm - Black w/ Red Stitching	PT.SA.VL.3205.BKR	\$24.95
51	SEAT CLAMP - CNC Aluminum - Promax 335QX - Frictionless - 31.8mm - Black	PT.SC.PX.335QX.318.B	\$8.95
52	SEATPOST - Aluminum Rigid - Promax SP 271 - 0° Offset - 27.2 x 350 - Black	PT.SP.PX.271.272350.B	\$18.95
53	SHIFTER - SRAM - XO - Twist Grip - 9 Speed	PT.SH.SR.XO.TW.9	\$45.00
54	SPOKE - 12G - 196mm - 18/8 Stainless Steel - Black	PT.SP.12G.196.SS.B	\$0.50
55	SPOKE - 12G - 237mm - 18/8 Stainless Steel - Black	PT.SP.12G.237.SS.B	\$0.50
56	SPOKE NIPPLE - Brass - 12G - 16mm	PT.SP.NI.BR.12G.16	\$0.50
57	STEM - Aluminum - Promax - 570 - Adjustable x 105mm x 1 1/8" Quill x 31.8mm - Black	PT.ST.PX.570.318.B	\$28.95
58	THROTTLE - Wux - HALF TWIST - Battery Led Indicator - w/ On & Off Push Button - 36V	PT.TH.WX.29.15.36V	\$18.95
59	TIRES - Continental - Traffic - 26" x 2.1"	PT.TI.CO.TR.26.21	\$34.95
60	TUBES - Kenda - 26" - 1.95 / 2.125" - Butyl Rubber - 32mm Valve	PT.TU.KE.26.212.32	\$6.95