

# HLF SERIES FLIPAWAY GATE



2,500 lb., 3,000 lb., 4,000 lb., and 5,000 lb. Capacities


**WALTCO'S HLF -  
(HEAVY DUTY, LEVEL RIDE FLIPAWAY)  
LIFTGATE MODEL OFFERS SIMPLIFIED DESIGN  
AND MAXIMUM PERFORMANCE  
FOR A VARIETY OF TRUCK AND  
TRAILER APPLICATIONS.**



*Products shown may feature optional equipment.  
Content subject to change without notice.*

## STANDARD HLF SERIES ADVANTAGES INCLUDE:

- 60" x 84" Knurled aluminum platform provides large work area for handling pallet loads.
- Galvanized steel components.
- Faster operating speeds increase productivity.
- Retracted and protected lift cylinders in the transit position.
- Bolt-on ready, heavy-duty, reinforced thick bed extension.
- New rocking pivot hinge minimizes digging into and damaging concrete or asphalt.
- Simplified maintenance:
  - External pump for easy access
  - Grease fittings at all major hinge points
  - Nitro hardened pin with increased bearing reduces maintenance and downtime
  - Dedicated ground improves electrical component life
  - Bolt-on parting bar
- Molded & potted toggle switch.
- Power down.
- Bolt-on, two-step dock bumpers with 21" UHMW bumper pads.
- Lock valves incorporated on lift cylinders.
- Adjustable bolts to control platform pitch.
- Torsion-assist platform extension.

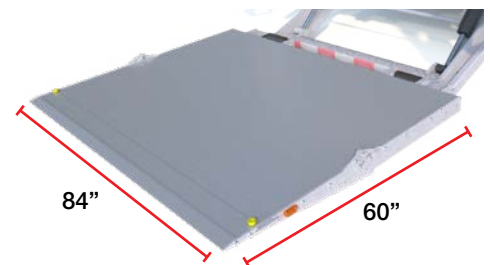

60" deep x 84" wide knurled aluminum platform with individually replaceable extrusion provides a large work area for handling pallet loads and service ability.



Industry leading, standard heavy-duty thick bed extension with reinforcing angle offers greater strength. It's bolt-on ready with adjustable two-step dock bumpers and UHMW bumper pads to protect both the dock and liftgate from rubbing damage.



Designed Simplicity - Maximum Performance

[www.waltco.com](http://www.waltco.com)


# HLF SERIES FLIPAWAY GATE

## SPECIFICATIONS:

Bed Ht: 46"-60"



54" of useable platform depth with cart stops deployed.



Simplified rocking pivot hinge reduces damage to concrete or asphalt that rollers may cause.



Lift cylinders store in a retracted position behind protective plating, shielding them from road debris that causes pitting.



Optional walk ramp can be operated without moving the liftgate.

Model	Capacity	Platform	Ramp	Weights
HLF/AP-25	2,500 lbs.	60" x 84"	Wedge	1114 lbs.
HLF/AP-30*	3,000 lbs.	60" x 84"	Wedge	1114 lbs.
HLF/AP-40	4,000 lbs.	60" x 84"	Wedge	1352 lbs.
HLF/AP-50	5,000 lbs.	60" x 84"	Wedge	1352 lbs.

Notes: Walk Ramp fits bed height 49" (laden) to 60"

\*Eligible for Waltco's Quick-Lift Program (see details below)

## OPTIONAL EQUIPMENT:

- Auxiliary power kits for straight trucks and trailers.
- Lights for dock bumpers.
- Dual cart stops - 54" of useable platform depth with cart stops deployed.
- Walk Ramp version of bed extension (ramp can be utilized without operation of the liftgate).
- Bolt-on FMVSS/CMVSS 223, 224-compliant under ride.
- Hand-held Pendant Control to allow operation of the liftgate from ground or bed level.
- Dual Controls for street-side or curbside operation.
- Swing Door Compatible Bed Extension - this patented design allows the HLF to be mounted onto vehicles with swing doors.
- Cab-mounted Power Shut-off Switch - allows operator to shut off power to liftgate control switch(es) to prevent unauthorized use.
- Reinforced bed extension.
- Customized options- contact factory.
- Solar charging.
- Wire rope step.

ORDER YOUR LIFTGATE TODAY,  
AND WE'LL SHIP IT TOMORROW.

The HLF Series is one of many liftgates in our Quick-Lift Program — Waltco will ship up to five HLF Series liftgates by the end of the following business day.

[www.waltco.com](http://www.waltco.com)



**Waltco Lift Corp.**  
**Corporate Office United States**  
 1777 Miller Parkway  
 Streetsboro, OH 44241  
 P: 330.633.9191  
 F: 330.633.1418

**Waltco Sales**  
 T: 800.211.3074  
 F: 800.211.3075  
 Email: [sales@waltco.com](mailto:sales@waltco.com)  
[Waltco.com](http://Waltco.com)

[waltco.com](http://waltco.com)

